# Welcome to FRTN10 Multivariable Control

**Anton Cervin** 

Department of Automatic Control
Lund University

# **Department of Automatic Control**



- Founded 1965 by Karl Johan Aström (IEEE Medal of Honor)
- Approx. 50 employees
- Education for B, BME, C, D, E, F, I, K, M, N, Pi, W
- Research in complex systems, robotics, real-time systems, process control, automotive systems, biomedicine, . . .

#### Lecture 1 – Outline

Course program

Course introduction

- Signals and systems
  - Review of system representations
  - Signal norm and system gain

#### **Lecture 1 – Outline**

Course program

- Course introduction
- 3 Signals and systems
  - Review of system representations
  - Signal norm and system gain

#### **Administration**

Anton Cervin
Course responsible and lecturer



anton@control.lth.se 046-222 44 75 M:5145

Mika Nishimura

Course administrator



mika@control.lth.se 046-222 87 85 M:5141

#### **Prerequisites**

FRT010 Automatic Control, Basie Course or FRTN25 Automatic Process Control is required prior knowledge.

It is assumed that you have taken the basic courses in mathematics, including linear algebra and calculus in several variables, and preferably also systems & transforms or linear systems.

#### **Course material**

All course material is available in English. Most lectures are covered by the following textbook sold by KFS AB:

- Glad & Ljung: Reglerteori Flervariabla och olinjära metoder, (2 uppl.), Studentlitteratur, 2003.
- English edition: Glad & Ljung: Control Theory –
   Multivariable and Nonlinear Methods, Taylor & Francis
   Ltd / CRC Press

All other material on the homepage:

- Lecture slides (also handed out)
- Lecture notes (for Lectures 1–8, 13)
- Exercise problems with solutions
- Laboratory assignments

Reolerteor:

http://www.control.lth.se/course/FRTN10

#### Lectures

The lectures (30 hours in total) are given by Anton Cervin on Mondays (w. 35–39, 41), Tuesdays (w. 35–36), and Thursdays (w. 35–41).

See the LTH schedule generator for details.

#### **Exercise sessions and TAs**

The exercise sessions (28 hours in total) are arranged in three groups:

| Group | Times                | Room  | Teaching Assistant |
|-------|----------------------|-------|--------------------|
| 1     | Wed 10-12, Fri 8-10  | Lab A | Marcus T. Andrén   |
| 2     | Wed 13–15, Fri 10–12 | Lab A | Josefin Berner     |
| 3     | Wed 15–17, Fri 13–15 | Lab A | Olof Troeng        |

Marcus T. Andrén



Josefin Berner



**Olof Troeng** 



marcus@control.lth.se

josefinb@control.lth.se

oloft@control.lth.se

## Laboratory experiments

The three laboratory sessions (12 hours in total) are mandatory. Booking lists are posted on the course homepage. You must sign up before the first session starts. Before each session there are pre-lab assignments that must be completed. No reports are required afterwards.

| Lab | Weeks | Booking | Room  | Responsible      | Process               |
|-----|-------|---------|-------|------------------|-----------------------|
| 1   | 37–38 | Aug 30  | Lab C | Olof Troeng      | Flexible linear servo |
| 2   | 39–40 | Sep 13  | Lab C | Josefin Berner   | Quadruple tank        |
| 3   | 41–42 | Sep 27  | Lab B | Marcus T. Andrén | Rotating crane        |
|     |       |         |       |                  |                       |







#### **Exam**

The exam is given on October 25 at 08:00-13:00.

A second occasion is on January 3, 2017.

The textbook, lecture notes, and lecture slides (with markings/notes) are allowed on the exam. You may also bring an *Automatic Control—Collection of Formulae*, standard mathematical tables (TEFYMA), and a pocket calculator.

#### Use of computers in the course

- In our lab rooms, use your personal student account or a common course account
- Matlab is used in both exercise sessions and laboratory sessions
  - Control System Toolbox
  - Simulink
  - CVX (http://cvxr.com/cvx, used in exercise session 12)
  - (Symbolic Math Toolbox)

#### Feedback and Q&A

For each course LTH uses the following feedback mechanisms

- CEQ (reporting / longer time scale)
- Student representatives (fast feedback)
  - Election of student representative ("kursombud")

We will be using Piazza for Q&A:

https://piazza.com/lu.se/fall2016/frtn10/home

Please post your questions here!

#### Course registration

Course registration in Ladok will be performed on Wednesday.

Put a mark next to your name on the registration list (or fill in your details on an empty row at the end).

If you decide to drop out during the first three weeks of the course, you should notify us so that we can unregister you in Ladok.

Do not forget to do "terminsregistrering"!


#### Lecture 1 – Outline

- Course program
- Course introduction
- Signals and systems
  - Review of system representations
  - Signal norm and system gain

# Multivariable control – Example 1



# Multivariable control – Example 1




# **Example 2: Rollover control**




# **Example 2: Rollover control**






# **Example 3: DVD reader**






- 3.5 m/s speed along track
- 0.022  $\mu$ m tracking tolerance
- 100 μm deviations at ~23 Hz due to asymmetric discs

# Focus and tracking control

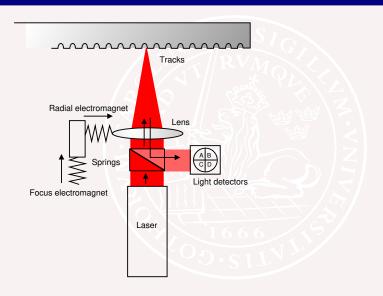


#### Focus and tracking control

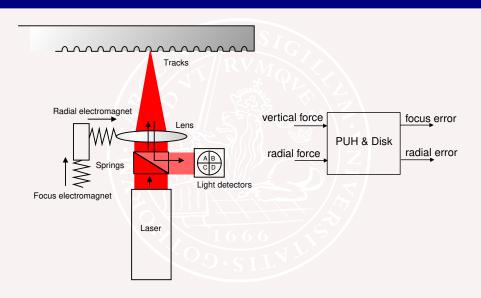


# **Example 4: Control of friction stir welding**

Prototype FSW machine at the Swedish Nuclear Fuel and Waste Management Company (SKB) in Oskarshamn



# Control of friction stir welding

#### Measurement variables:




- Temperatures (3 sensors)
- Motor torque
- Shoulder depth

#### Control objectives:

- Keep weld temperature at 845 °C
- Keep shoulder depth at 1 mm

#### Control variables:



- Tool rotation speed
- Weld speed
- Axial force

#### Contents of the course


Despite its name, this course is **not only about multivariable control**. You will also learn about:

- sensitivity and robustness
- design trade-offs and fundamental limitations
- stochastic control
- optimization of controllers


#### **Outline of lectures**

L1–L5 Specifications, models and loop-shaping by hand
 L6–L8 Limitations on achievable performance
 L9–L11 Controller optimization: analytic approach
 L12–L14 Controller optimization: numerical approach
 L15 Course review


# **Lecture 1: Systems and signals**




# **Lecture 2: Stability and robustness**

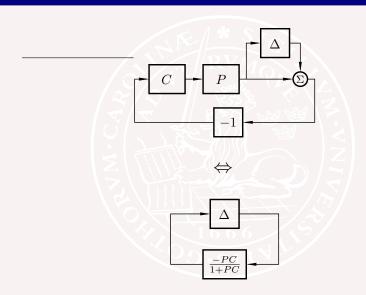


#### **Lecture 3: Disturbance models**

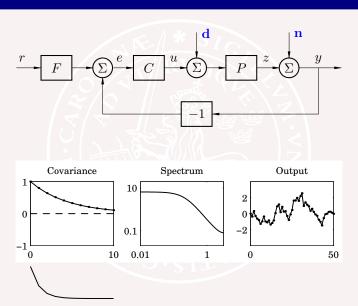


# **Lecture 4: Control synthesis in frequency domain**

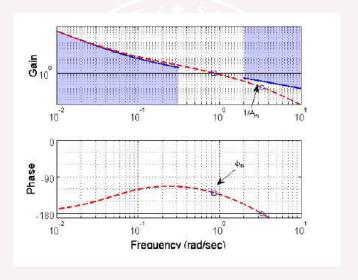


#### **Lecture 5: Case study**

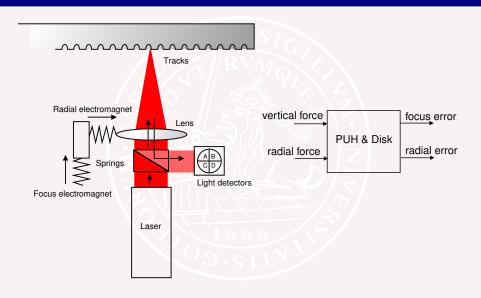


# Lecture 6: Multivariable zeros, singular values, gramians

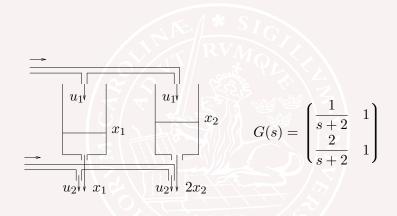


#### **Lecture 7: Fundamental limitations**

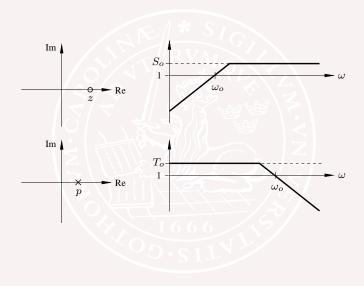

#### **Lecture 8: Decentralized control**

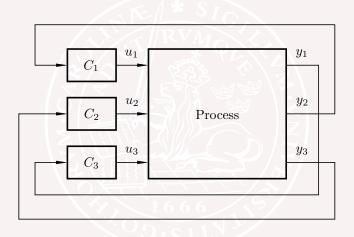


#### Lecture 9: Linear-quadratic optimal control

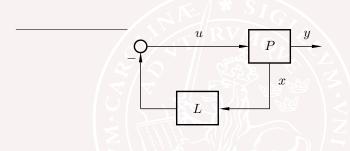


$$\min_{L} \int_{0}^{\infty} \left( x^{T} Q_{1} x + u^{T} Q_{2} u \right) dt$$


# **Lecture 10: Optimal observer-based feedback**

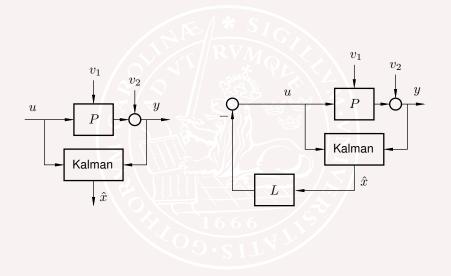

### Lecture 11: More on LQG



# Lecture 12: Youla parametrization, internal model control



ALL stabilizing controllers:


$$C(s) = \left[I - Q(s)P_{yu}(s)\right]^{-1}Q(s)$$

# Lecture 13: Synthesis by convex optimization

#### Minimize


$$\int_{-\infty}^{\infty} |P_{zw}(i\omega) + P_{zu}(i\omega) \sum_{k=0}^{Q(i\omega)} Q_{k}\phi_{k}(i\omega) P_{yw}(i\omega)|^{2} d\omega$$

### subject to constraints

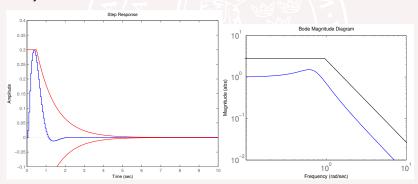

### **Lecture 14: Controller simplification**


$$C(s) = \frac{(s/1.3+1)(s/45+1)}{(s/1.2+1)(s^2+0.4s+1.04)(s/50+1)} \approx \frac{s^2-2.3s+57}{s^2+0.41s+1.1}$$



### **Lecture 1 – Outline**

- Course program
- Course introduction
- 3 Signals and systems
  - Review of system representations
  - Signal norm and system gain

# **Systems**



A **system** is a mapping from the input signal u(t) to the output signal  $y(t), -\infty < t < \infty$ :

$$y = \mathcal{S}(u)$$

# System properties

### A system ${\mathcal S}$ is

- causal if  $y(t_1)$  only depends on  $u(t), -\infty < t \le t_1,$  non-causal otherwise
- static if  $y(t_1)$  only depends on  $u(t_1)$ , dynamic otherwise
- discrete-time if u(t) and y(t) are only defined for a countable set of discrete time instances  $t=t_k,\ k=0,\pm 1,\pm 2,\ldots$ , continuous-time otherwise

# System properties (cont'd)

### A system ${\mathcal S}$ is

- single-variable or scalar if u(t) and y(t) are scalar signals, multivariable otherwise
- time-invariant if  $y(t)=\mathcal{S}(u(t))$  implies  $y(t+\tau)=\mathcal{S}(u(t+\tau)),$  time-varying otherwise
- linear if  $S(\alpha_1 u_1 + \alpha_2 u_2) = \alpha_1 S(u_1) + \alpha_2 S(u_2)$ , nonlinear otherwise


## LTI system representations

We will mainly deal with continuous-time **linear time-invariant** (LTI) systems in this course

For LTI systems, the same input–output mapping  ${\cal S}$  can be represented in a number of equivalent ways:

- linear ordinary differential equation
- linear state-space model
- transfer function
- impulse response
- step response
- frequency response
- ...

## State-space models



Linear state-space model:

$$\begin{cases} \dot{x} = Ax + Bu \\ y = Cx + Du \end{cases}$$

Solution:

$$y(t) = Ce^{At}x(0) + \int_0^t Ce^{A(t-\tau)}Bu(\tau)d\tau + Du(t)$$

# Mini-problem 1

$$\dot{x}_1 = -x_1 + 2x_2 + u_1 + u_2 - u_3$$

$$\dot{x}_2 = -5x_2 + 3u_2 + u_3$$

$$y_1 = x_1 + x_2 + u_3$$

$$y_2 = 4x_2 + 7u_1$$

How many state variables, inputs and outputs?

Determine the matrices A,B,C,D to write the system as

$$\begin{cases} \dot{x} = Ax + Bu \\ y = Cx + Du \end{cases}$$

# **Change of coordinates**

$$\begin{cases} \dot{x} = Ax + Bu \\ y = Cx + Du \end{cases}$$


#### Change of coordinates

$$z = Tx$$
,  $T$  invertible

$$\begin{cases} \dot{z} = T\dot{x} = T(Ax + Bu) &= T(AT^{-1}z + Bu) = TAT^{-1}z + TBu \\ y = Cx + Du &= CT^{-1}z + Du \end{cases}$$

Note: There are infinitely many different state-space representations of the same system  $\ensuremath{\mathcal{S}}$ 


### Impulse response



### Common experiment in medicine and biology

$$g(t) = \int_0^t Ce^{A(t-\tau)}B\delta(\tau)d\tau + D\delta(t) = Ce^{At}B + D\delta(t)$$
$$y(t) = \int_0^t g(t-\tau)u(\tau)d\tau = (g*u)(t)$$

### Step response



### Common experiment in process industry

$$y(t) = \int_0^t g(t - \tau)u(\tau)d\tau = \int_0^t g(\tau)d\tau$$

### **Transfer function**

$$U(s)$$
  $G(s)$   $Y(s)$ 

$$G(s) = \mathcal{L}\{g(t)\}$$

$$y(t) = (g*u)(t) \quad \Leftrightarrow \quad Y(s) = G(s)U(s)$$

Conversion from state-space form to transfer function:

$$G(s) = C(sI - A)^{-1}B + D$$

### **Transfer function**

A transfer function is rational if it can be written as


$$G(s) = \frac{B(s)}{A(s)}$$

where B(s) and A(s) are polynomials in s

It is proper if  $\deg B \leq \deg A$  and strictly proper if  $\deg B < \deg A$ 

A rational and proper transfer function can be converted to state-space form (see Collection of Formulae)

### Frequency response




Assume stable transfer function  $G = \mathcal{L}g$ . Input  $u(t) = \sin \omega t$  gives


$$\begin{split} y(t) &= \int_0^t g(\tau) u(t-\tau) d\tau = \operatorname{Im} \left[ \int_0^t g(\tau) e^{-i\omega\tau} d\tau \cdot e^{i\omega t} \right] \\ [t \to \infty] &= \operatorname{Im} \left( G(i\omega) e^{i\omega t} \right) = |G(i\omega)| \sin \left( \omega t + \arg G(i\omega) \right) \end{split}$$

After a transient, also the output becomes sinusoidal

## The Nyquist diagram




## The Bode diagram

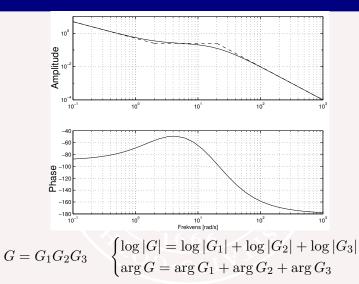

Each new factors enter additively!

### The Bode diagram

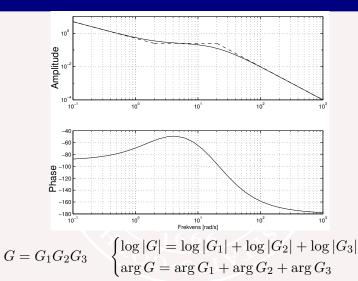


Each new factors enter additively!

Hint: Set Matlab scales

> ctrlpref

# Signal norm and system gain



#### How to quantify

- ullet the "size" of the signals u and y
- ullet the "maximum amplification" between u and y

# Signal norm and system gain

The  $L_2$  norm of a signal  $y(t) \in \mathbf{R}^n$  is defined as

$$\|y\|_2 := \sqrt{\int_0^\infty |y(t)|^2 dt} = \sqrt{\frac{1}{2\pi} \int_{-\infty}^\infty |Y(i\omega)|^2 d\omega}$$

The last equality is known as Parseval's theorem

The  $L_2$  gain of a system S with input u and output S(u) is defined as

$$\|\mathcal{S}\| := \sup_{u} \frac{\|\mathcal{S}(u)\|_2}{\|u\|_2}$$

# Mini-problem 2

What are the gains of the following scalar LTI systems?

1. 
$$y(t) = -u(t)$$
 (a sign shift)

2. 
$$y(t) = u(t - T)$$
 (a time delay)

3. 
$$y(t) = \int_0^t u(\tau)d\tau$$
 (an integrator)

4. 
$$y(t) = \int_0^t e^{-(t-\tau)} u(\tau) d\tau$$
 (a first order filter)

# $L_2$ -gain for LTI systems

Consider a stable LTI system  $\mathcal S$  with input u and output  $\mathcal S(u)$  having the transfer function G(s). Then

$$\|S\| := \sup_{u} \frac{\|S(u)\|_{2}}{\|u\|_{2}} = \sup_{\omega} |G(i\omega)| := \|G\|_{\infty}$$

**Proof.** Let  $y = \mathcal{S}(u)$ . Then

$$\|y\|^2 = \frac{1}{2\pi} \int_{-\infty}^{\infty} |Y(i\omega)|^2 d\omega = \frac{1}{2\pi} \int_{-\infty}^{\infty} |G(i\omega)|^2 \cdot |U(i\omega)|^2 d\omega \le \|G\|_{\infty}^2 \|u\|^2$$

The inequality is arbitrarily tight when u(t) is a sinusoid near the maximizing frequency.

(How to interpret  $|G(i\omega)|$  for matrix transfer functions will be explained in Lecture 2.)