

Market-Driven Systems Marknadsstyrda System FRTN20


Lecture 4 –Key Performance Indicators (KPI)

Functional Model of an Enterprise

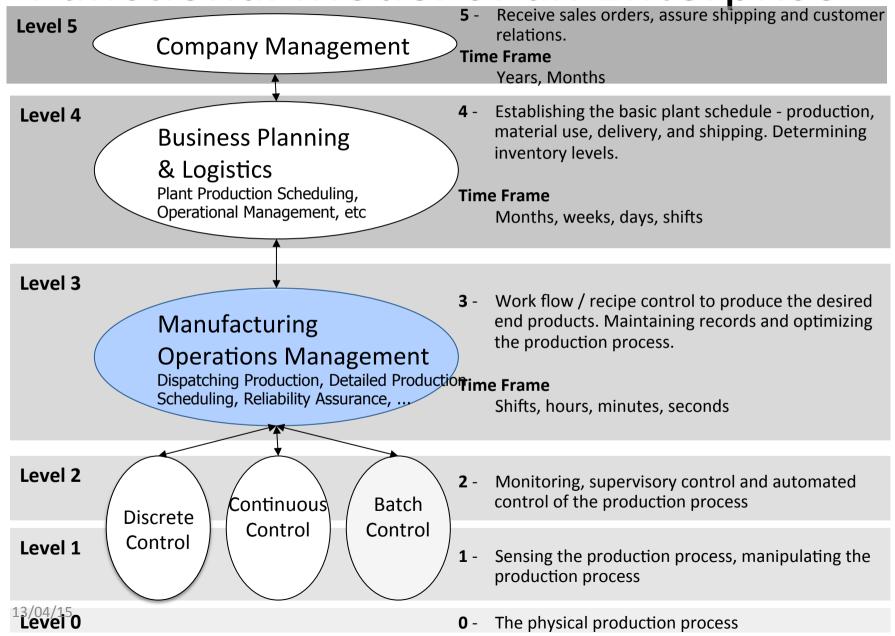

Physical Model of an Enterprise

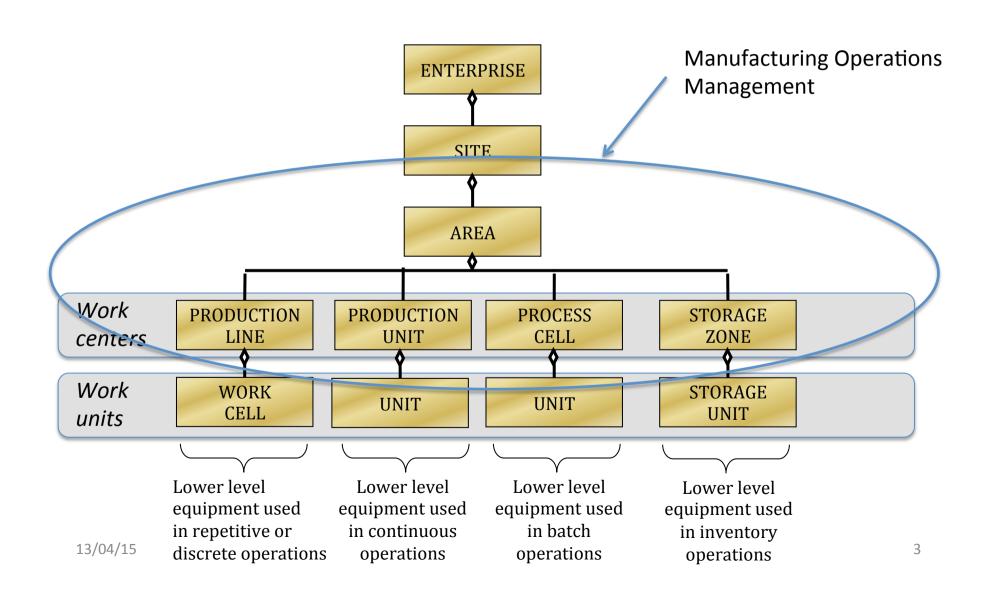

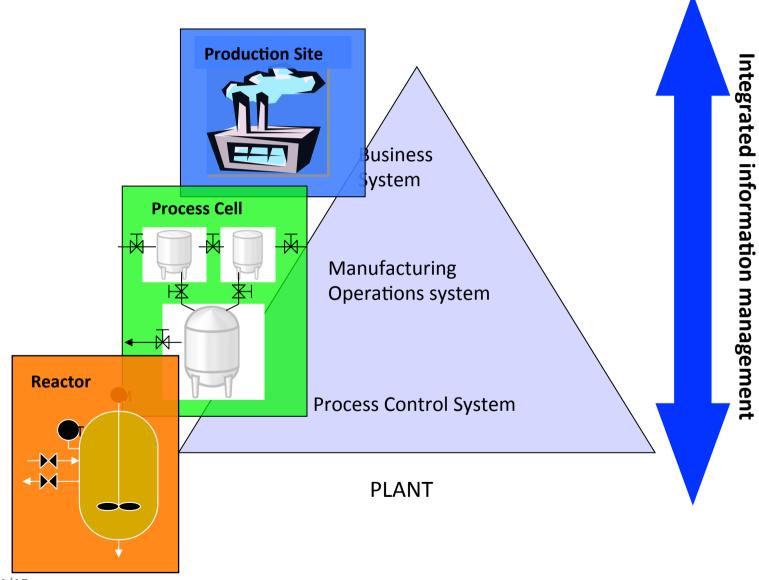

13/04/15

4


Visibility into plant operations is now being seen as a major hurdle to improving business performance


(Source: Forrester Research)


What are your biggest problems with global manufacturing?" Percentage of 50 global manufacturing companies responding:		
Poor visibility into plant operations	38%	
Inaccurate demand forecasting	36%	
Poor communication	24%	
Supply shortfalls	18%	
Poor customer satisfaction	8%	

What Manufacturers Consider the Major Challenges they are Facing!

Figure 2. Internal Challenges (all performance categories)

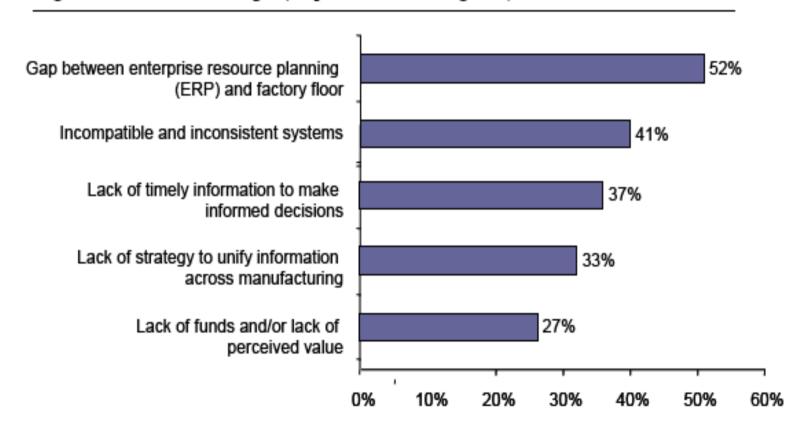

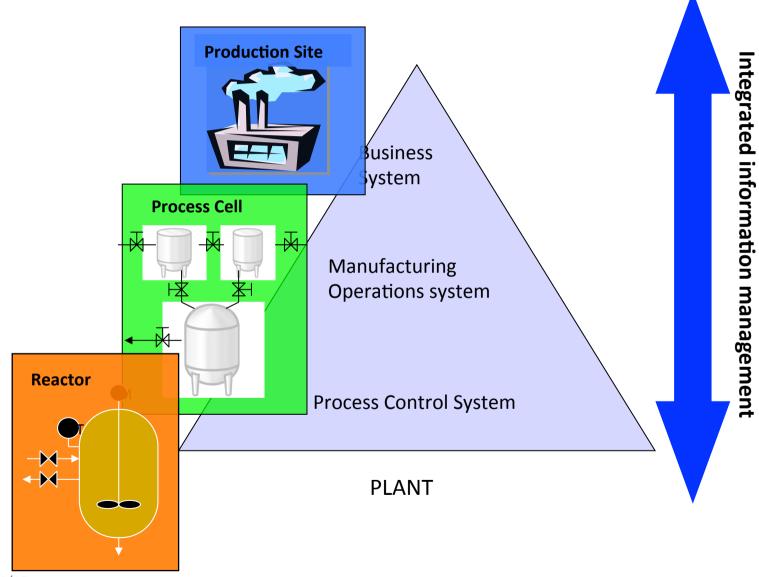

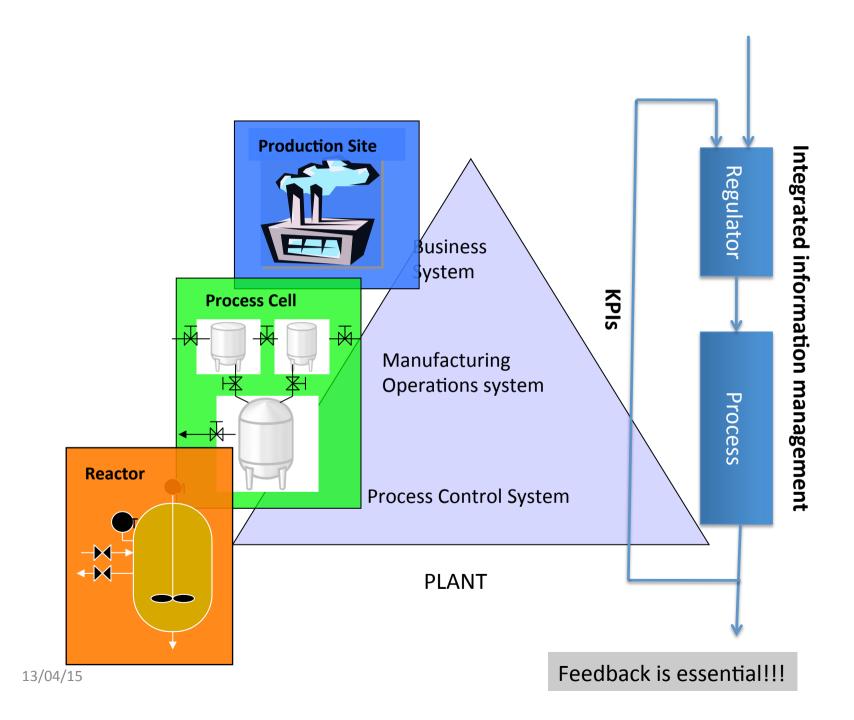

Key Performance Indicators

- Key performance indicator (KPI) is a measure of performance.
- Such measures are commonly used to help an organization define and evaluate how successful it is, typically in terms of making progress towards its long-term organizational goals.
- KPIs can be specified by answering the question "What is really important to different stakeholders?". KPIs may be monitored using Business Intelligence techniques to assess the present state of the business and to assist in prescribing a course of action. The act of monitoring KPIs in real-time is known as Business Activity Monitoring (BAM).
- There are Marketing-KPIs, Supply-chain-KPIs, production-KPIs etc.

- Variable Costs or Direct Variable costs ("rörliga kostnader")
 - Costs that depends on the production
 - Raw material costs, production-related energy costs
 - Cp OPEX
- Fixed costs ("fasta kostnader")
 - Costs that are independent on how much that is produced
 - Salary, depreciation of equipment and machines, rent, heating, maintenance
 - Cp CAPEX

- Contribution margin ("täckningsbidraget")
 - The price for a product minus the variable cost
 - Must cover the fixed costs
 - The rest contributes to the profit
 - Varies depending on
 - Market
 - Raw material costs
 - Energy costs
- Constrained by the market ("marknadsbegränsad")
 - A production system is constrained by the market if it is not running at maximum capacity due to market reasons
 - No possibility to increase the profit by increasing the production
 - Instead reduce variable costs or improve the quality

- Availability ("tillgänglighet")
 - How large part of the time that the system has been producing
 - Percentage over, e.g., a year
 - E.g., 70% 99.5%
- **Downtime** ("stopptid")
 - Inverse of availability
- Production rate ("produktionstakt")
 - Product per time unit
 - Tonne/h, kg/h, ...
- Production capacity ("produktionskapacitet")
 - The theoretical maximum amount of in-spec product that can be produced per time unit

- Effectiveness ("anläggningsutnyttjande")
 - The actual production as a percentage of the production capacity
- Example:
 - Production in April = 5272 tonne
 - Downtime 94 hours out of 744 \rightarrow 12,6%
 - Availability = 87.4%
 - Average production rate = 5272/(744-95) = 8.1 tonne/ hour
 - Production capacity = 220 tonne per 24 hour = 6280
 - Effectiveness in April = 5272/6280 = 77.3%

- Product that does not meet the specifications is off-spec
 - Downgrade to a lower quality (less profit)
 - Reject
- Overall Equipment Efficiency (OEE)
 - Efficiency measure that also takes quality into account
 - OEE = Availability*Effectiveness*Quality
 - ("TAK = Tillgänglighet * Anläggningsutnyttjande * Kvalitet")
 - However, some companies use production rate instead of effectiveness
 - Amount of produced product of the right quality

- Yield ("utbyte")
 - Measures how effectively the raw material is used
 - Kilo product / kilo raw material
- Several of the above quantities can be used as Key Performance Indicators (KPIs)
 - "nyckeltal"
 - Economical
 - Technical
 - E.g. reasons for stops, yield, important flows and concentrations, energy balances

Improvements of Continuous Production Plants

Control performance

The control performance is often regulatory, e.g. holding a measured and/or computed quantity at its desired value.

Process performance

The process performance is a measure of how well the process meets its objectives. This could for example be production rate.

• Economic performance


The economic performance is measured in financial terms, e.g., financial production rate which is expressed as Money (Euros/dollars/SEK) per production time.

=> The most important performance measurements are referred to as KPIs

Control Improvements

- - Increase the production rate
 - Set point closer to upper "safety limit"
 - Decrease consumption of energy or raw material
 - Set point closer to lower "quality" limit
 - In both cases the setpoint must really be changed
 - "target shift"

Control Improvement

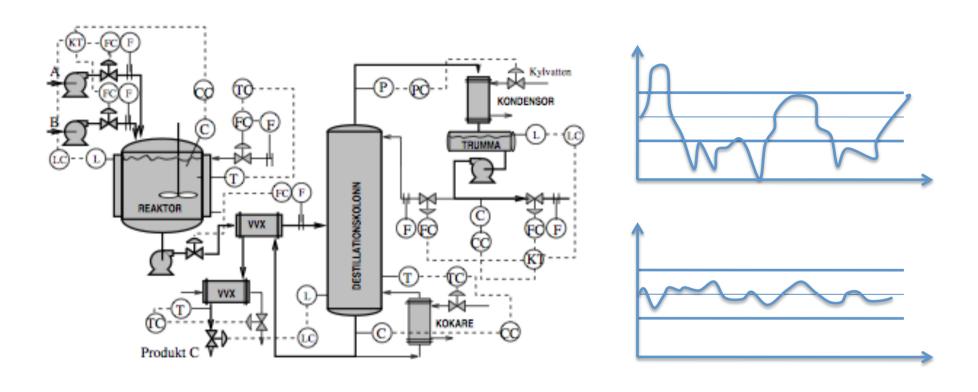

The plant improves the control of concentration in the reactor. The variation in the concentration is reduced by 40% (control improvement)

Reasons for Control Improvements

- Automatic instead of manual control
- Better controller tuning
- Change in controller structure (e.g, PID instead of PI)
- Change control loop structure
 - Use different measurements
 - Move sensors and actuators
- Change sensors and actuators
 - Better sensors and actuators


•

Examples of Process Improvements Caused by Control Improvements

- Increased production rate
- Faster change over times
- Faster start up times
- Improved quality
- Decreased raw material and enercy consumption
- Lower utility costs
- Less labor
- Fewer unwanted byproducts
- Better yield


Economic improvement: Process Improvements stated in term of increased profit (€, \$, SEK)

Process Improvement

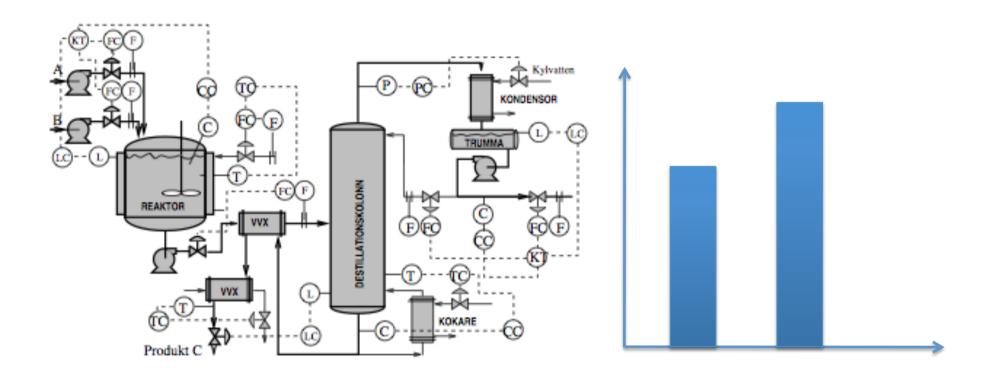

The plant improves the control of concentration in the reactor. The variation in the concentration is reduced by 40% (**control improvement**). The control improvements allow the elimination of delays for product analysis, so the plant can not turn out 10% more product per day (**process improvement**).

Economic Improvement

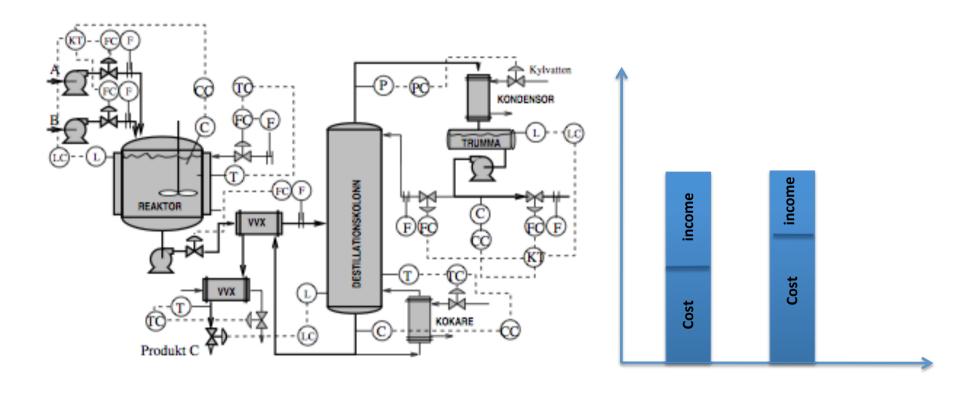

If there is market for the additional product, there will be an economical improvement.

If there is no market for the additional product, there will be an economical net loss since the aditional product will require additional raw material.


KPIs – ISO 22400

There is an ongoing activity defining the KPIs used in Manufacturing

 ISO 22400 Automation systems and integration — Key performance indicators (KPIs) for manufacturing operations management

ISO 22400

- Multi-part standard
 - Part 1: Overview, concepts and terminology
 - Part 2: Definitions and descriptions
 - Part 3: Exchange and use
 - Part 4: Relationships and dependencies
- So far, focus has been on part 2 and 1

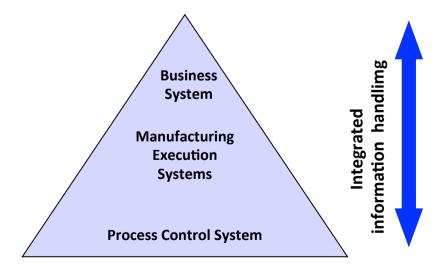

ISO 22400 - Part 2

- Subtitle: Definitions and descriptions of KPIs
- Published 2014
- What does it contain?
- Chapter 6: Description of KPIs
 - 34 KPIs are described through their name, Formula, UoM, Effect model, etc
- The elements in the formula are listed in Chapter 5
- The structure of the KPI definition is given in Chapter 4
- The effect models (root-cause) are presented in AnnexA

Description of KPIs

KPI definition		
Content:		
Name		
ID		
Description		
Scope		
Formula		
Unit of measure		
Range		
Trend		
Context:		
Timing		
Audience		
Production methodology		
Effect model diagram		
Notes	(Here is space for constraints, usage and other info)	

Example: 6.1 Worker Efficiency

KPI definition Content		
ID		
Description	The worker efficiency considers the relationship between the Actual personnel work time (APWT) related to production orders and the actual personnel attendance time (APAT) of the employee.	
Scope	Personnel	
Formula	Worker Efficiency = APWT / APAT	
Unit of measure	%	
Range	Min: 0% Max: 100%	
Trend	The higher the better	
Context		
Timing	Periodically	
Audience	Supervisor, management	
Production methodology	Discrete, batch, continuous	
Effect model diagram	see A.3	
Notes	When calculating worker efficiency be careful of possible double counts if the worker is working on several work units or production orders simultaneously	
13/04/15		

Example: Worker Efficiency

5.1.3.1. Actual Personnel Work time (APWT)

The actual personnel work time shall be the time that a worker needs for the execution of a production order.

5.1.3.5. Actual Personnel Attendance Time (APAT)

The actual personnel attendance time shall be the total time that worker is available to work on production orders. It does not include actual time for company authorized break periods (i.e. lunch). It is the difference between login and logout excluding breaks.

Example: Worker Efficiency


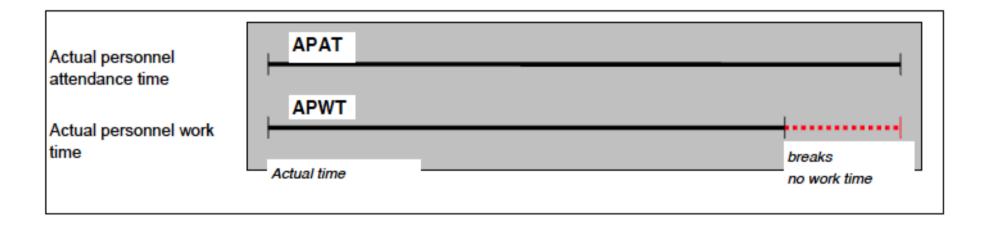


Figure 5 - Time lines for personnel

Example: Worker Efficiency

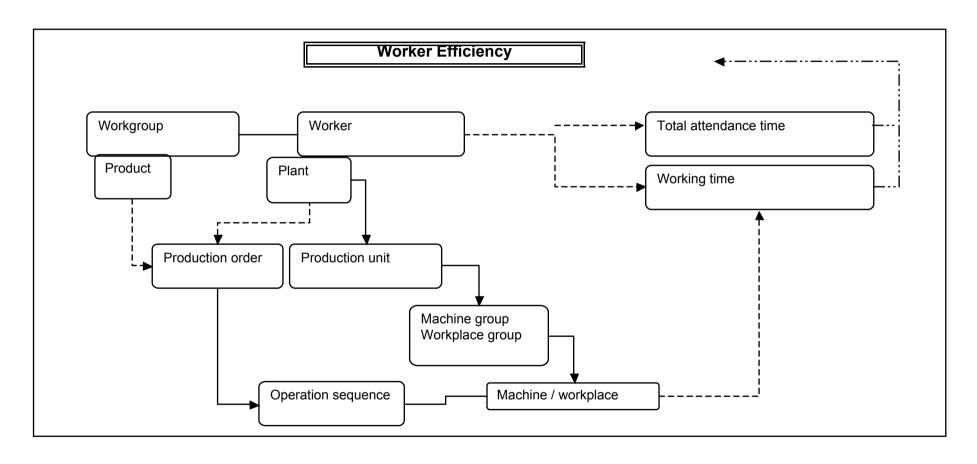

A 1. Effect Model for Worker Efficiency

KPI definition	
Content	
Name	Overall Equipment Effectiveness Index
ID	
Description	The OEE Index represents the availability of a work unit (see Error! Reference source not found.), the effectiveness of the work unit (see Error! Reference source not found.), and the quality ratio (see Error! Reference source not found.) KPI's integrated in a single indicator.
Scope	Work unit, product, time period, product, defect types
Formula	OEE Index = Availability * Effectiveness * Quality ratio
Unit of measure	%
Range	Min: 0% Max: 100%
Trend	The higher, the better
Context	
Timing	On-demand, periodically, real-time
Audience	Operator. supervisor, management
Production methodology	Discrete, batch, continuous
Effect model diagram	See A.8
Notes	Overall Equipment Effectiveness (OEE) is an indicator for the efficiency of work units, work centres' and areas with several work units or an entire work centre. The OEE Index forms the basis for improvements by better production information, identification of production losses, and improvement of the product quality by optimized processes.
	The calculation of OEE based on the hierarchy structure (see fig 2) is only useful if the characteristic of the work unit processes would be comparable. Before starting a benchmark based on the OEE index the criteria for a comparability should be checked.

Example: Overall Equipement Effectiveness Index

KPI definition		
Content		
Name	Availability	
ID		
Description	Availability is a ratio that shows the relation between the actual production time (APT) and the Planned busy time (PBT) for a work unit	
Scope	Work unit, product, time period, product	
Formula	Availability = APT / PBT	
Unit of measure	%	
Range	Min: 0% Max: 100%	
Trend	The higher, the better	
Context		
Timing	On-demand, periodically	
Audience	Supervisor, management	
Production methodology	Discrete, batch, continuous	
Effect model diagram	See A.10	
Notes	Availability indicates how strongly the capacity of a work unit for the production is used in relation to the available capacity.	
	The term availability is also called degree of utilisation or capacity factor.	

5.1.3.6. Actual production Time (APT)

The actual production time shall be the time during which a work unit is producing. It includes only the value-adding functions.

5.1.2.4. Planned Busy Time (PBT)

The planned busy time shall be the operating time minus the planned downtime.

Note: The planned down time can be used for planned maintenance work. The planned busy period is available for the detailed planning of the work unit for expected production orders.


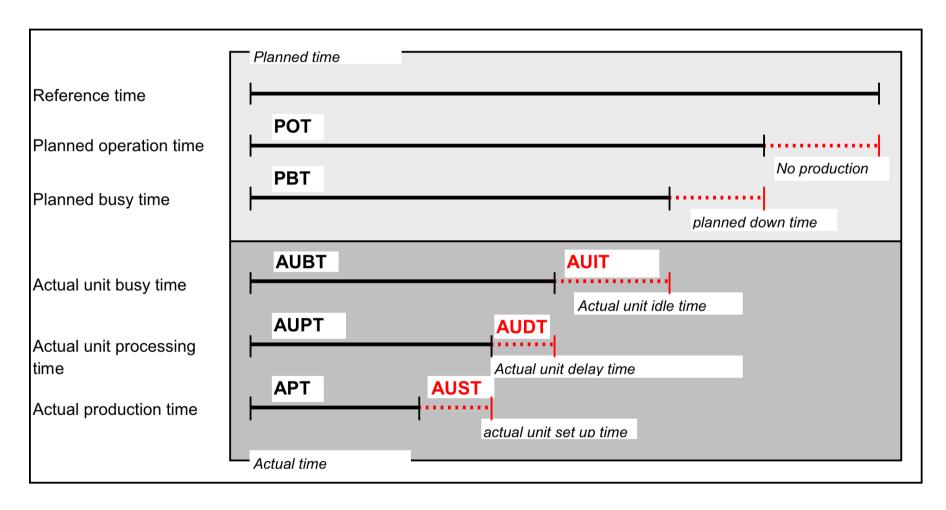


Figure 3 - Time lines for work units

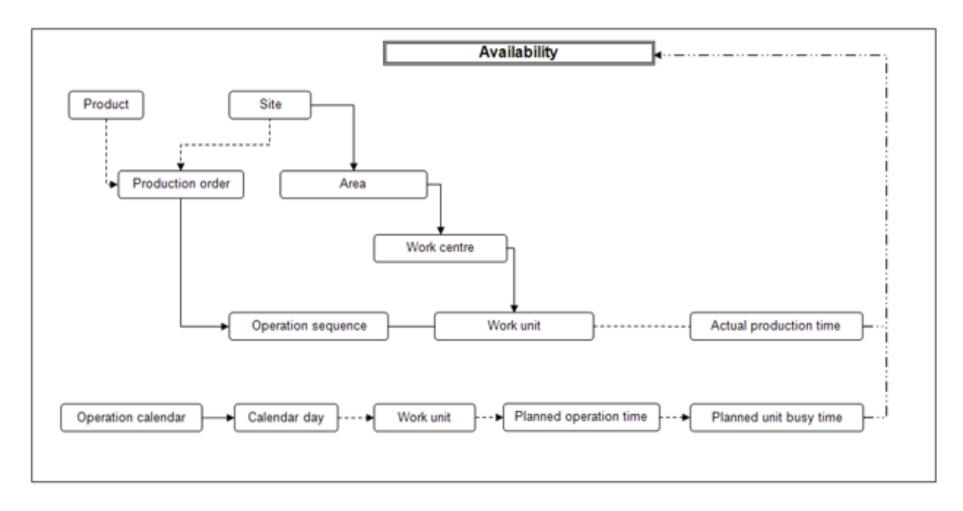

A 8. Effect Model for Availability

KPIs defined

The following 34 KPIs are defined in ISO 22400 – Part 2

- 8.1 Worker Efficiency
- 8.2. Allocation Ratio
- 8.3. Throughput rate
- 8.4. Allocation efficiency
- 8.5 Utilization efficiency
- 8.6. Overall equipment effectiveness index
- 8.7 Net equipment effectiveness index
- 8.8 Availability
- 8.9 Effectiveness
- 8.10 Quality Ratio
- 8.11 Setup Rate
- 8.12 Technical efficiency
- 8.13 Production process ratio
- 8.14 Actual to planned scrap ratio
- 8.15 First pass yield
- 8.16 Scrap ratio
- 8.17 Rework ratio

KPIs defined

The following 35 KPIs are defined in ISO 22400 – Part 2

- 8.18 Fall off ratio
- 8.19. Machine capability index
- 8.20 Critical machine capability index
- 8.21 Process capability index
- 8.22 Critical process capability index
- 8.23 Comprehensive energy consumption
- 8.24 Inventory turns
- 8.25 Finished goods ratio
- 8.26 Integrated goods ratio
- 8.27 Production loss ratio
- 8.28 Storage and transportation loss ratio
- 8.29 Other loss ratio
- 8.30 Equipment load ratio
- 8.31 Mean operating time between failures
- 8.32 Mean time to failure
- 8.33 Mean time to restoration
- 8.34 Corrective maintenance ratio

Parameter-Indicator Matrix

Parameters		Keyperformanse Indicators																					
		Worter affektoy	Altocatos rate	Thoughtfab	чисатот е тоетоу	Utilication orthology	DES-li dar	NDC-Index	Arabbility	DROBLERS	Graffy rate	and nec	Technical efficiency	Proctice the process rate	Actial to planed scrap ratio	Firetpaceylold	Steep radio	Rework rate	Fail off Batto	Macilie capability index (G.)	Or fixed macking capability index $\langle C_{\rm min} \rangle$	Process capability index (C.)	Oribot process capability lides (\mathbb{Q}_{μ})
Parred In	Planned bisyttine (197)				٠			•	٠														
	Planted on time per unit (PRTU)									•													
Real time	Actual personnel work time (A PVIT)	•																					
	Actial mittousy fine (AUPT)							•				٠											
	Astral settles γ to e (AUBT)		٠		٠	٠																	
	Actual order execution time (AO ET)		٠	•										•									
	Actual personnel attendance fin e (APAT)	•																					
	Actual production time (PT)					٠			•	•			٠	٠									
	Astral mitdelaytine (DET)												٠										
	Administration to (ASUT)											٠											
Log attest quarties	Scrap quantity (SC)														٠		•		•				
	Planned scrap quantity (FSQ)														•								
	Goodgearthy (54)										•												
	Peworkquartty (RQ)																	٠					
	Proclassiciq was tity (FQ)			٠						٠	٠						•	٠					
	Produced quantity (FQ) in the first																		•				

ISO 22400

- Part-1: Overview, concepts and terminology
- Part-2: Definitions and descriptions
- Part-3: Exchange and use (draft)
- Part-4: Relationships and dependencies (draft)

13/04/15

- Subtitle: Overview, concepts and terminology
- Published 2014
- What does it contain?
 - Concept of KPIs (Chapter 4)
 - Definitions and descriptions Part2 (Chapter 5)
 - Exchange and use Part3 (Chapter 6)
 - Relationships and dependencies Part4 (Chapter 7)

- Subtitle: Overview, concepts and terminology
- Chapter 4: Concept of Key Performance Indicators
 - General
 - Criteria for KPIs
 - Characterisation of KPIs
 - Types of KPIs
 - Categories of KPIs
 - Generating KPIs
 - Identification and Selection
 - Structure of KPI
 - Presentation of KPI


Types of KPIs

- Ratio: a functional relation between two elements of the same unit-of-measure
- <u>Utilization: a ratio with time as the unit of measure.</u>
- Efficiency: ...
- Effectiveness: ...
- Rate: a functional relation between two elements of different UoM where the unit of the denominator is time.
- Capability_index:

- Subtitle: Overview, concepts and terminology
- Chapter 5: Definitions and Descriptions (Part2)
 - General model
 - Table structure of KPI (table format)
 - Root cause diagram (Effect models)
- Chapter 6: Exchange and Use (Part3)
 - General
 - Abstract structure (UML structure)
- Chapter 7: Relationships and dependencies
 - General
 - Model of Relationship and dependencies
 - Effectiveness of KPIs
 - Maturity Model

- Subtitle: Overview, concepts and terminology
- Chapter 7: Relationships and dependencies (Part4)

If you change one KPI, another one might be effected.

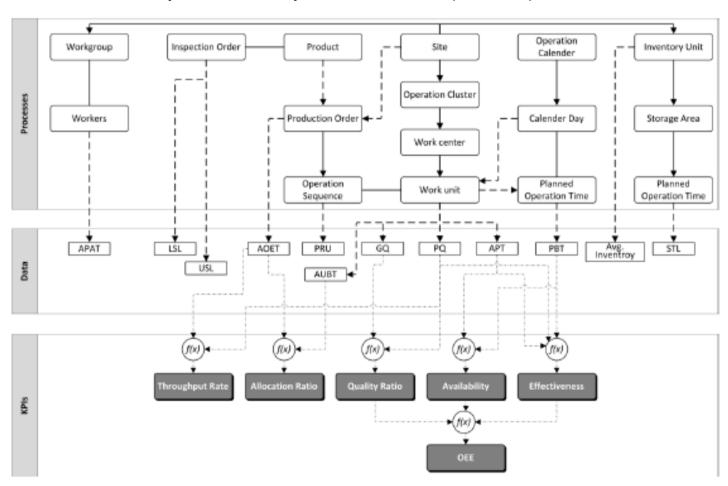

Are there any business reasons for using KPIs?

A company is considered a *Business Mover*if it has improved:

- a) More than 10% on one or many of the financial metrics
- b) More than 1% on over half of the finacial metrics

From: MESA and Industry Directions survey "Metrics that Matter", Oct 2006.

Characteristics of Business Movers							
Definition:	Improved over 10% on one or						
Level of Business	improved over 1% on six of 11						
Improvement	business/finance metrics in survey						
Metrics Capability	Business Movers Difference						
Operations and business	67% more likely to be at least						
metrics effectively linked	somewhat effective (65% vs. 39%)						
Metrics data collection	50% more likely to have fully						
automation	automated (15% vs. 10%)						
Timeliness of displaying	Over 2.5 times as likely to display						
KPIs to operators whose	results to operations in 24 hours or						
activities they reflect	less (46% vs. 18%)						
Latency between	43% more likely to have weekly or						
business metrics and	24 hours latency (50% vs. 35%),						
operations that caused	less likely quarterly or annually						
results	(10% vs. 16%)						
Use of MES & operations	33% use MES vs. 25% of others;						
dashboards	33% use dashboards vs. 17%						
Results	Business Movers Edge						
Know what they	Over six times less likely to answer						
measure for business	"don't know what metrics are in						
	use"						
ROI on applications	31% of applications achieved ROI						
	in under two years vs. 11% for						
	others						
Improvements against	Over 2.75 times as likely to						
operations KPIs	improve over 10% on at least one						
	operations KPI or over 1% on 10						
	operations KPIs (83% vs. 22%)						


Are there any business reasons for using KPIs?

Typical for Business movers is that they:

- 1) Have well defined KPIs
- 2) Have informed employees
- 3) use IT systems to get measurements, calculate Kpis and display the results.

From: MESA and Industry Directions survey "Metrics that Matter", Oct 2006.

Are there any business reasons for using KPIs?

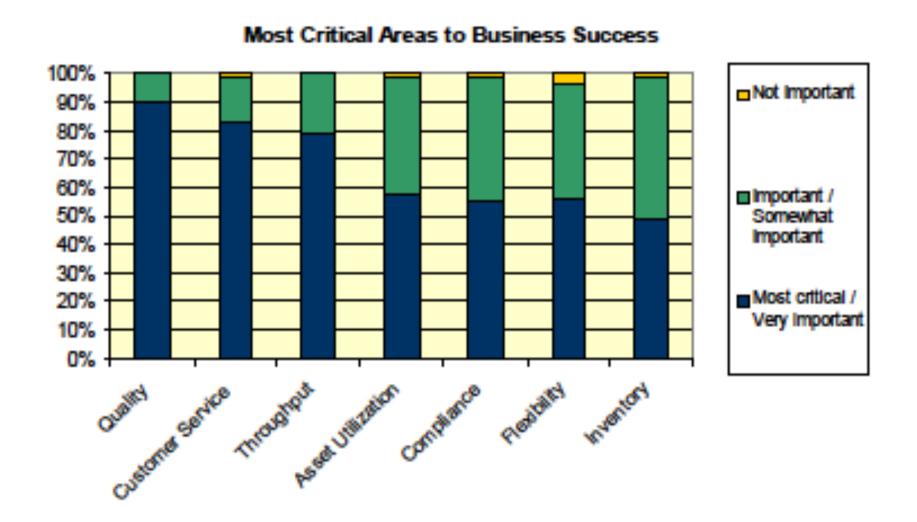

From: MESA and Industry Directions survey "Metrics that Matter", Oct 2006.

SUMMARY

- ISO 22400 is a standard about Key Performance Indicators (KPIs) for Manufacturing Operations Management (level 3)
- The standard defines commonly used KPIs within level 3.
- 34 KPIs are defined
- Part 1 and Part 2 was released in 2014
- Part 3 and Part 4 work is ongoing.
- Using KPIs has shown to be successful when improving the performance of a company!

Functional Model of an Enterprise

