

# Robust Distributed Routing in Dynamical Networks—Part II: Strong Resilience, Equilibrium Selection and Cascaded Failures

Giacomo Como, *Member, IEEE*, Ketan Savla, *Member, IEEE*, Daron Acemoglu, Munther A. Dahleh, *Fellow, IEEE*, and Emilio Frazzoli, *Senior Member, IEEE*

**Abstract**—Strong resilience properties of dynamical networks are analyzed for distributed routing policies. The latter are characterized by the property that the way the outflow at a non-destination node gets split among its outgoing links is allowed to depend only on local information about the current particle densities on the outgoing links. The strong resilience of the network is defined as the infimum sum of link-wise flow capacity reductions making the asymptotic total inflow to the destination node strictly less than the total outflow at the origin. A class of distributed routing policies that are responsive to local information is shown to yield the maximum possible strong resilience under such local information constraints for an acyclic dynamical network with a single origin-destination pair. The maximal achievable strong resilience is shown to be equal to the minimum node residual capacity of the network. The latter depends on the limit flow of the unperturbed network and is defined as the minimum, among all the non-destination nodes, of the sum, over all the links outgoing from the node, of the differences between the maximum flow capacity and the limit flow of the unperturbed network. We propose a simple convex optimization problem to solve for equilibrium flows of the unperturbed network that minimize average delay subject to strong resilience guarantees, and discuss the use of tolls to induce such an equilibrium flow in traffic networks. Finally, we present illustrative simulations to discuss the connection between cascaded failures and the resilience properties of the network.

**Index Terms**—Cascaded failures, distributed routing policies, dynamical networks, price of anarchy, strong resilience.

Manuscript received March 28, 2011; revised January 03, 2012; accepted July 16, 2012. Date of publication July 24, 2012; date of current version January 19, 2013. This work was supported in part by NSF EFR-I-ARES grant number 0735956 and AFOSR grant number FA9550-09-1-0538. The work of G. Como was supported in part by the Swedish Research Council through the LCCC Linnaeus Center. Any opinions, findings, and conclusions or recommendations expressed in this publication are those of the authors and do not necessarily reflect the views of the supporting organizations. A preliminary version of this paper appeared in part as [1]. This work was performed when K. Savla was with the Laboratory for Information and Decision Systems, Massachusetts Institute of Technology. Recommended by Associate Editor F. Paganini.

G. Como is with the Department of Automatic Control, Lund University, 22362 Lund, Sweden (e-mail: giacomo.como@control.lth.se).

K. Savla is with the Sonny Astani Department of Civil and Environmental Engineering, University of Southern California, Los Angeles, CA 90089-2531 USA (e-mail: ksavla@usc.edu).

D. Acemoglu is with the Department of Economics, Massachusetts Institute of Technology, Cambridge, MA 02142 USA (e-mail: daron@mit.edu).

M. A. Dahleh and E. Frazzoli are with the Laboratory for Information and Decision Systems, Massachusetts Institute of Technology, Cambridge, MA 02139 USA (e-mail: dahleh@mit.edu; frazzoli@mit.edu).

Color versions of one or more of the figures in this paper are available online at <http://ieeexplore.ieee.org>.

Digital Object Identifier 10.1109/TAC.2012.2209975

## I. INTRODUCTION

**R**OUSTNESS of routing policies for networks is a central problem which is gaining increased attention with a growing awareness to safeguard critical infrastructure networks against natural and man-induced disruptions. Information constraints limit the efficiency and resilience of such routing policies, and the possibility of cascaded failures through the network adds serious challenges to this problem. The difficulty is further magnified by the presence of dynamical effects, e.g., see [2].

This paper considers the framework of *dynamical networks* introduced in our companion paper [3], where the network is modeled by a system of ordinary differential equations derived from mass conservation laws on directed acyclic graphs with a single origin-destination pair and a constant outflow from the origin node. The rate of change of the particle density on each link of the network equals the difference between the *inflow* and the *outflow* on that link. The latter is modeled to depend on the current particle density on that link through a *flow function*. We focus on *distributed routing policies* whereby the way the total outflow of a node gets split among its outgoing links is allowed to depend only on *local information*, consisting of the current particle densities on the outgoing links of the same node. We call the dynamical network *fully transferring* if the total inflow at the destination node asymptotically approaches the total outflow at the origin node. Our primary objective in this paper is to analyze the robustness of distributed routing policies in terms of the network's *strong resilience*, which is defined as the infimum sum of link-wise magnitude of disturbances making the perturbed dynamical network not fully transferring.

We prove that the maximum possible strong resilience is yielded by a class of *locally responsive* distributed routing policies, introduced in the companion paper [3]. Such policies are characterized by the property that the portion of its inflow that a node routes towards an outgoing link does not decrease as the particle density on any other outgoing link from that node increases. We show that the strong resilience of a dynamical network with such locally responsive distributed routing policies equals the *minimum node residual capacity* of the network. The latter is defined as the minimum, among all the non-destination nodes, of the sum of the difference between the maximum flow capacity and the limit flow of the unperturbed network, on all the links outgoing from the node. Using ideas from [4], one can show that, when the information constraints on the routing policies are relaxed, i.e., the routing policies

can access information about the particle densities over the whole network, then the strong resilience of the network can be made equal to the network residual capacity. The latter is defined as the difference between the min-cut capacity of the network and the constant outflow at the origin node. Since the minimum node residual capacity is less than or equal to,—and in most nontrivial cases, strictly less than—the network residual capacity, this shows that the information constraints on the routing policies can reduce the strong resilience of the network. Moreover, the minimum residual capacity depends on the limit flow of the unperturbed network. This is in stark contrast to our result in [3], where we showed that the weak resilience is unaffected by local information constraints on the routing policies and is independent of the limit flow of the unperturbed network. We also propose a simple convex optimization problem to solve for equilibrium flows of the unperturbed network that minimize the average delay subject to strong resilience guarantees. Finally, given a desired equilibrium flow with strictly positive component on every link of an unperturbed traffic network, we derive a class of link-wise tolls which yield that equilibrium flow. Since the strong resilience and the average delay of the unperturbed traffic network depend on the equilibrium flow of the unperturbed network, a system planner can use such tolls as an additional control mechanism to achieve a desired performance guarantee for the traffic network. These results are derived under the condition that the link-wise flow functions are strictly increasing and the links have unbounded capacity for flow densities. We present illustrative simulations discussing cascaded failures that arise when the links have finite capacities on flows as well as densities. We describe cascaded failures within a dynamical network framework and illustrate their effect on network resilience. A rigorous resilience analysis as well as the design of robust control policies for this model is an ongoing work, e.g., see [5].

Stability analysis of network flow control policies under various routing policies is carried out in [6]–[8]. A detailed comparison between the settings of these papers and our dynamical network setting is included in the companion paper [3]. The present paper also studies the connection between the robustness properties of the network and its equilibrium flow. The role of equilibrium in the efficiency of a system, especially in economic settings involving multiple agents, has attracted a lot of attention, e.g., see [9]. One of the most celebrated notions to measure the inefficiency of an equilibrium is the *price of anarchy* [10]. In a road traffic setting, the price of anarchy of a given network state quantifies the extent to which the average delay faced by a driver at that state exceeds the least possible average delay over all possible network states. In this paper, we propose a robustness-based metric for measuring inefficiency of equilibrium states of dynamical networks. Finally, the study of cascaded failures in complex networks has attracted a great deal of attention recently, e.g., see [11], [12] where the authors propose various models for this phenomenon.

The contributions of this paper are as follows: 1) we formulate the notion of strong resilience of a dynamical network, and show that the class of locally responsive routing policies yield the maximum strong resilience under local information constraints; 2) we formulate a simple convex optimization problem

to solve for the most robust equilibrium flow, and discuss the use of link-wise tolls in implementing any given equilibrium (including the most robust) flow with strictly positive component on every link in traffic networks; and 3) we present illustrative simulations to discuss cascaded failures in dynamical networks and their effect on network resilience.

The rest of the paper is organized as follows. In Section II, we briefly summarize the dynamical network framework and then postulate the notion of strong resilience. In Section III, we state the main result on strong resilience, and provide discussions on the results. Section IV discusses the problem of selection of the most strongly resilient equilibrium flow of the network and the use of tolls to induce such an equilibrium in traffic networks. In Section V, we report illustrative simulation results, discussing the effect of cascading failures on the resilience of the network. We conclude in Section VI with remarks on future research directions and state proofs of the main results in the Appendices A and B.

Before proceeding, we define some preliminary notations to be used throughout the paper. Let  $\mathbb{R}$  be the set of real numbers,  $\mathbb{R}_+ := \{x \in \mathbb{R} : x \geq 0\}$  be the set of nonnegative real numbers. Let  $\mathcal{A}$  and  $\mathcal{B}$  be finite sets. Then,  $|\mathcal{A}|$  will denote the cardinality of  $\mathcal{A}$ ,  $\mathbb{R}^{\mathcal{A}}$  (respectively,  $\mathbb{R}_+^{\mathcal{A}}$ ) the space of real-valued (nonnegative-real-valued) vectors whose components are indexed by elements of  $\mathcal{A}$ , and  $\mathbb{R}^{\mathcal{A} \times \mathcal{B}}$  the space of matrices whose real entries are indexed by pairs in  $\mathcal{A} \times \mathcal{B}$ . The transpose of a matrix  $M \in \mathbb{R}^{\mathcal{A} \times \mathcal{B}}$  will be denoted by  $M' \in \mathbb{R}^{\mathcal{B} \times \mathcal{A}}$ , while  $\mathbf{1}$  will stand for the all-one vector, whose size will be clear from the context. Let  $\text{cl}(\mathcal{X})$  be the closure of a set  $\mathcal{X} \subseteq \mathbb{R}^{\mathcal{A}}$ . A directed multigraph is the pair  $(\mathcal{V}, \mathcal{E})$  of a finite set  $\mathcal{V}$  of nodes, and of a multiset  $\mathcal{E}$  of links consisting of ordered pairs of nodes (i.e., we allow for parallel links between a pair of nodes). If  $e = (v, w) \in \mathcal{E}$  is a link, where  $v, w \in \mathcal{V}$ , we shall write  $\sigma(e) = v$  and  $\tau(e) = w$  for its tail and head node, respectively. The sets of outgoing and incoming links of a node  $v \in \mathcal{V}$  will be denoted by  $\mathcal{E}_v^+ := \{e \in \mathcal{E} : \sigma(e) = v\}$  and  $\mathcal{E}_v^- := \{e \in \mathcal{E} : \tau(e) = v\}$ , respectively. Moreover, we shall use the shorthand notation  $\mathcal{R}_v := \mathbb{R}_+^{\mathcal{E}_v^+}$  for the set of nonnegative-real-valued vectors whose entries are indexed by elements of  $\mathcal{E}_v^+$ ,  $\mathcal{S}_v := \{p \in \mathcal{R}_v : \sum_{e \in \mathcal{E}_v^+} p_e = 1\}$  for the simplex of probability vectors over  $\mathcal{E}_v^+$ , and  $\mathcal{R} := \mathbb{R}_{+}^{\mathcal{E}}$  for the set of nonnegative-real-valued vectors whose entries are indexed by the links in  $\mathcal{E}$ .

## II. DYNAMICAL NETWORKS

The notion of dynamical network was introduced in the companion paper [3]. In order to render the present paper self-contained, we state here the concepts and notation which are most relevant. We start with the following definition.

*Definition 1 (Network):* A network  $\mathcal{N} = (\mathcal{T}, \mu)$  is the pair of a *topology*, described as a finite directed multigraph  $\mathcal{T} = (\mathcal{V}, \mathcal{E})$ , where  $\mathcal{V}$  is the node set and  $\mathcal{E}$  is the link multiset, and a family of *flow functions*  $\mu := \{\mu_e : \mathbb{R}_+ \rightarrow \mathbb{R}_+\}_{e \in \mathcal{E}}$  describing

the functional dependence  $f_e = \mu_e(\rho_e)$  of the flow on the density of particles on every link  $e \in \mathcal{E}$ . The *flow capacity* of a link  $e \in \mathcal{E}$  is

$$f_e^{\max} := \sup_{\rho_e \geq 0} \mu_e(\rho_e). \quad (1)$$

We shall use the notation  $\mathcal{F}_v := \times_{e \in \mathcal{E}_v^+} [0, f_e^{\max}]$  for the set of admissible flow vectors on outgoing links from node  $v$ , and  $\mathcal{F} := \times_{e \in \mathcal{E}} [0, f_e^{\max}]$  for the set of admissible flow vectors for the network. We shall write  $f := \{f_e : e \in \mathcal{E}\} \in \mathcal{F}$ , and  $\rho := \{\rho_e : e \in \mathcal{E}\} \in \mathcal{R}$ , for the vectors of flows and of densities, respectively, on the different links. The notation  $f^v := \{f_e : e \in \mathcal{E}_v^+\} \in \mathcal{F}_v$ , and  $\rho^v := \{\rho_e : e \in \mathcal{E}_v^+\} \in \mathcal{R}_v$  will stand for the vectors of flows and densities, respectively, on the outgoing links of a node  $v$ . We shall compactly denote by  $f = \mu(\rho)$  and  $f^v = \mu^v(\rho^v)$  the functional relationships between density and flow vectors.

Throughout this paper, we shall restrict ourselves to networks satisfying the following assumptions.

*Assumption 1:* The topology  $\mathcal{T}$  contains no cycles, has a unique origin (i.e., a node  $v \in \mathcal{V}$  such that  $\mathcal{E}_v^-$  is empty), and a unique destination (i.e., a node  $v \in \mathcal{V}$  such that  $\mathcal{E}_v^+$  is empty). Moreover, there exists a path in  $\mathcal{T}$  to the destination node from every other node in  $\mathcal{V}$ .

*Assumption 2:* For every link  $e \in \mathcal{E}$ , the map  $\mu_e : \mathbb{R}_+ \rightarrow \mathbb{R}_+$  is continuously differentiable, strictly increasing, such that  $\mu_e(0) = 0$ , and  $f_e^{\max} < +\infty$ .

In particular, Assumption 1 implies that (see, e.g., [13]) one can identify (in a possibly non-unique way) the node set  $\mathcal{V}$  with the integer set  $\{0, 1, \dots, n\}$ , where  $n := |\mathcal{V}| - 1$ , in such a way that

$$\mathcal{E}_v^- \subseteq \bigcup_{0 \leq u < v} \mathcal{E}_u^+, \quad \forall v = 0, \dots, n. \quad (2)$$

In particular, (2) implies that 0 is the origin node, and  $n$  the destination node in the network topology  $\mathcal{T}$ . An *origin-destination cut* (see, e.g., [14]) of  $\mathcal{T}$  is a partition of  $\mathcal{V}$  into  $\mathcal{U}$  and  $\mathcal{V} \setminus \mathcal{U}$  such that  $0 \in \mathcal{U}$  and  $n \in \mathcal{V} \setminus \mathcal{U}$ . Let  $\mathcal{E}_{\mathcal{U}}^+ = \{(u, v) \in \mathcal{E} : u \in \mathcal{U}, v \in \mathcal{V} \setminus \mathcal{U}\}$  be the set of all the links pointing from some node in  $\mathcal{U}$  to some node in  $\mathcal{V} \setminus \mathcal{U}$ . The *min-cut capacity* of a network  $\mathcal{N}$  is defined as

$$C(\mathcal{N}) := \min_{\mathcal{U}} \sum_{e \in \mathcal{E}_{\mathcal{U}}^+} f_e^{\max} \quad (3)$$

where the minimization runs over all the origin-destination cuts of  $\mathcal{T}$ . Throughout this paper, we shall assume a constant total outflow  $\lambda_0 \geq 0$  at the origin node. Let us define the set of *admissible equilibrium flows* associated to  $\lambda_0$  as

$$\begin{aligned} \mathcal{F}^*(\lambda_0) := \left\{ f^* \in \mathcal{F} : \sum_{e \in \mathcal{E}_0^+} f_e^* = \lambda_0, \right. \\ \left. \sum_{e \in \mathcal{E}_v^+} f_e^* = \sum_{e \in \mathcal{E}_v^-} f_e^*, \quad \forall 0 < v < n \right\}. \end{aligned}$$

Then, it follows from the max-flow min-cut theorem (see, e.g., [14]), that  $\mathcal{F}^*(\lambda_0) \neq \emptyset$  whenever  $\lambda_0 < C(\mathcal{N})$ . That is, the min-cut capacity equals the maximum flow that can pass from the origin to the destination while satisfying capacity constraints on the links, and conservation of mass at the intermediate nodes.

We now recall the notion of a distributed routing policy from [3].

*Definition 2 (Distributed Routing Policy):* A *distributed routing policy* for a network  $\mathcal{N}$  is a family of differentiable functions  $\mathcal{G} := \{G^v : \mathcal{R}_v \rightarrow \mathcal{S}_v\}_{0 \leq v < n}$  determining the way the outflow at each non-destination node  $v$  gets split among its outgoing link set  $\mathcal{E}_v^+$ , as a function of the observed current particle density  $\rho^v$  on the outgoing links from node  $v$ .

The salient feature of Definition 2 is that the routing policy  $G^v(\rho^v)$  depends only on the *local information* about the particle density  $\rho^v$  on the set  $\mathcal{E}_v^+$  of outgoing links of the non-destination node  $v$ .

We now state the definition of a dynamical network and its transfer efficiency.

*Definition 3 (Dynamical Network):* A *dynamical network* associated to a network  $\mathcal{N}$  satisfying Assumption 1, a distributed routing policy  $\mathcal{G}$ , and an outflow  $\lambda_0 \geq 0$  at the origin node, is the dynamical system

$$\frac{d}{dt} \rho_e(t) = \lambda_{\sigma(e)}(t) G_e^{\sigma(e)}(\rho(t)) - f_e(t), \quad \forall e \in \mathcal{E} \quad (4)$$

where

$$\begin{aligned} f_e(t) &:= \mu_e(\rho_e(t)), \\ \lambda_v(t) &:= \begin{cases} \lambda_0 & \text{if } v = 0 \\ \sum_{e \in \mathcal{E}_v^-} f_e(t) & \text{if } 0 < v \leq n. \end{cases} \end{aligned}$$

Given some flow vector  $f^o \in \mathcal{F}$ , the dynamical network (4) is said to be *fully transferring* with respect to  $f^o$  if the solution of (4) with initial condition  $\rho(0) = \mu^{-1}(f^o)$  satisfies

$$\lim_{t \rightarrow \infty} \lambda_n(t) = \lambda_0. \quad (5)$$

Definition 3 states that a dynamical network is fully transferring when the inflow at the destination node is asymptotically equal to the outflow from the origin node, i.e., there is no throughput loss asymptotically. Observe that a fully transferring dynamical network does not necessarily imply that the link-wise flows converge to an equilibrium, for it might in principle have a persistently oscillatory or more complex behavior. Nevertheless, it will prove useful to introduce the notions of equilibrium and limit flow as follows.

*Definition 4 (Equilibrium Flow and Limit Flow):* An *equilibrium flow* for the dynamical network (4) is a vector  $f^* \in \mathcal{F}^*(\lambda_0)$  such that

$$\lambda_{\sigma(e)}^* G_e^{\sigma(e)}(\rho^{\sigma(e)}) = f_e^*, \quad \forall e \in \mathcal{E} \quad (6)$$

where,  $\forall 0 \leq v < n$ ,

$$\rho_e^v := \mu_e^{-1}(f_e^*), \quad \lambda_v^* := \begin{cases} \lambda_0, & \text{if } v = 0 \\ \sum_{e \in \mathcal{E}_v^-} f_e^*, & \text{if } 0 < v < n. \end{cases}$$

A *limit flow* for the dynamical network (4) is a vector  $f^* \in \text{cl}(\mathcal{F})$  such that, for some initial flow  $f^\circ \in \mathcal{F}$ , the solution of (4) with initial condition  $\rho(0) = \mu^{-1}(f^\circ)$  satisfies

$$\lim_{t \rightarrow \infty} f(t) = f^*. \quad (7)$$

The set of all initial flows  $f^\circ \in \mathcal{F}$  such that (7) is satisfied will be referred to as the *basin of attraction* of  $f^*$ , and denoted by  $\mathcal{B}(f^*)$ .

*Remark 1:* Observe that an equilibrium flow  $f^* \in \mathcal{F}^*(\lambda_0)$  is always a limit flow, since the solution of the dynamical network (4) with initial flow  $f^\circ = f^*$  stays put for all  $t \geq 0$ , and hence it is trivially convergent to  $f^*$ . On the other hand, if a limit flow  $f^* \in \text{cl}(\mathcal{F})$  satisfies all the capacity constraints with strict inequality, i.e., if  $f^* \in \mathcal{F}$ , then necessarily  $f^* \in \mathcal{F}^*(\lambda_0)$  is also an equilibrium flow for (4), i.e., it satisfies mass conservation equations at all the non-destination nodes. In particular, if a dynamical network admits an equilibrium flow  $f^*$ , then it is necessarily fully transferring with respect to  $f^*$ , as well as with respect to all the initial flows  $f^\circ \in \mathcal{B}(f^*)$ .

In contrast, if  $f^* \in \text{cl}(\mathcal{F}) \setminus \mathcal{F}$ , i.e., if at least one of the capacity constraints is satisfied with equality, then  $f^*$  is not an equilibrium flow for (4). In fact, in this case one has that  $\sum_{e \in \mathcal{E}_v^+} f_e^* \leq \lambda_v^*$  with possibly strict inequality for some non-destination node  $0 \leq v < n$ . Hence, the dynamical network might still be not fully transferring. Finally, observe that a limit flow  $f^* \in \text{cl}(\mathcal{F})$  (and, *a fortiori*, an equilibrium flow) may not exist for general networks  $\mathcal{N}$ , and distributed routing policies  $\mathcal{G}$ .

*Remark 2:* Standard definitions in the literature are typically limited to static network flows describing transport of particles at equilibrium via conservation of mass. In fact, they usually consist (see, e.g., [14]) of the specification of a topology  $\mathcal{T}$ , a vector of flow capacities  $f^{\max} \in \mathcal{R}$ , and an admissible equilibrium flow vector  $f^* \in \mathcal{F}^*(\lambda_0)$  for  $\lambda_0 < C(\mathcal{N})$  (or, often,  $f^* \in \text{cl}(\mathcal{F}^*(\lambda_0))$  for  $\lambda_0 \leq C(\mathcal{N})$ ).

In contrast, in our model we focus on the off-equilibrium particle dynamics on a network  $\mathcal{N}$ , induced by a distributed routing policy  $\mathcal{G}$ . Existence of an equilibrium of the dynamical network (4) depends on the topology  $\mathcal{T}$ , the structural form of the flow functions  $\mu$  and of the distributed routing policy  $\mathcal{G}$ , as well as on the outflow  $\lambda_0$  at the origin node. A necessary condition for that is  $\lambda_0 < C(\mathcal{N})$ . In contrast, simple, locally verifiable, sufficient conditions on  $\mathcal{G}$  for the existence of an equilibrium flow might be hard to find for general dynamical networks. However, in some cases, it is reasonable to assume the distributed routing policy  $\mathcal{G}$  to be the outcome of a slow time-scale evolutionary dynamics with global feedback which can naturally lead to an equilibrium flow  $f^* \in \mathcal{F}^*(\lambda_0)$ . This has been shown, e.g., in our related work [4] on traffic networks, where the emergence of Wardrop equilibria is proven using tools from singular perturbation theory and evolutionary dynamics. Multiple time-scale dynamics leading to Wardrop equilibria have been studied in [15] for communication networks.

While, as discussed in Remark 2, finding simple, locally verifiable, sufficient conditions on the distributed routing policy  $\mathcal{G}$

for the existence of an equilibrium flow of the associated dynamical network (4) is typically nontrivial, a large class of distributed routing policies was proven in [3] to yield existence and uniqueness of a globally attractive limit flow  $f^* \in \text{cl}(\mathcal{F})$ , as recalled below.

*Definition 5 (Locally Responsive Distributed Routing):* A *locally responsive* distributed routing policy for a network with topology  $\mathcal{T} = (\mathcal{V}, \mathcal{E})$  and node set  $\mathcal{V} = \{0, 1, \dots, n\}$  is a family of continuously differentiable functions  $\mathcal{G} = \{G^v : \mathcal{R}_v \rightarrow \mathcal{S}_v\}_{v \in \mathcal{V}}$  such that, for every non-destination node  $0 \leq v < n$ :

a) For every  $\rho^v \in \mathcal{R}_v$ ,

$$\frac{\partial}{\partial \rho_e} G_j^v(\rho^v) \geq 0, \quad \forall j, e \in \mathcal{E}_v^+, \quad j \neq e.$$

b) For every nonempty proper subset  $\mathcal{J} \subsetneq \mathcal{E}_v^+$ , there exists a continuously differentiable map

$$G^{\mathcal{J}} : \mathcal{R}_{\mathcal{J}} \rightarrow \mathcal{S}_{\mathcal{J}}$$

where  $\mathcal{R}_{\mathcal{J}} := \mathbb{R}_{+}^{\mathcal{J}}$ , and  $\mathcal{S}_{\mathcal{J}} := \{p \in \mathcal{R}_{\mathcal{J}} : \sum_{j \in \mathcal{J}} p_j = 1\}$  is the simplex of probability vectors over  $\mathcal{J}$ , such that, for every  $\rho^{\mathcal{J}} \in \mathcal{R}_{\mathcal{J}}$ , if

$$\rho_e^v \rightarrow \infty, \quad \forall e \in \mathcal{E}_v^+ \setminus \mathcal{J}, \quad \rho_j^v \rightarrow \rho_j^{\mathcal{J}}, \quad \forall j \in \mathcal{J}$$

then

$$\begin{aligned} G_e^v(\rho^v) &\rightarrow 0, \quad \forall e \in \mathcal{E}_v^+ \setminus \mathcal{J} \\ G_j^v(\rho^v) &\rightarrow G_j^{\mathcal{J}}(\rho^{\mathcal{J}}), \quad \forall j \in \mathcal{J}. \end{aligned}$$

Let us restate the result proven in [3, Th. 1].

*Theorem 1 (Existence of Globally Attractive Limit Flow):* Let  $\mathcal{N}$  be a network satisfying Assumptions 1 and 2,  $\lambda_0 \geq 0$  a constant outflow at the origin node, and  $\mathcal{G}$  a locally responsive distributed routing policy. Then, there exists a unique limit flow  $f^* \in \text{cl}(\mathcal{F})$  such that  $\mathcal{B}(f^*) = \mathcal{F}$ . Moreover, if  $f_e^* = f_e^{\max}$  for some  $e \in \mathcal{E}_v^+$ , and  $0 \leq v < n$ , then  $f_e^* = f_e^{\max}$ , for every  $e \in \mathcal{E}_v^+$ .

We shall use the above result in the form of the following corollary, which is an immediate consequence of Theorem 1, and Remarks 1 and 2.

*Corollary 1:* Let  $\mathcal{N}$  be a network satisfying Assumptions 1 and 2,  $\lambda_0 \geq 0$  a constant outflow at the origin node, and  $\mathcal{G}$  a locally responsive distributed routing policy. If the limit flow  $f^*$  belongs to  $\mathcal{F}$ , then  $f^* \in \mathcal{F}^*(\lambda_0)$  is a globally attractive equilibrium flow for the dynamical network (4), and, consequently, (4) is fully transferring with respect to  $f^*$ .

*1) Example 1 (Locally Responsive Distributed Routing Policy):* Let  $\mathcal{N}$  be a network satisfying Assumptions 1 and 2, and  $0 \leq \lambda_0 < C(\mathcal{N})$  a constant outflow at the origin node. Let  $f^* = \mu(\rho^*) \in \mathcal{F}^*(\lambda_0)$ , and  $\eta > 0$ . Consider the distributed routing policy  $\mathcal{G} = \{G^v : \mathcal{R}_v \rightarrow \mathcal{S}_v\}$ , where

$$G_e^v(\rho^v) = \frac{f_e^* \exp(-\eta(\rho_e - \rho_e^*))}{\sum_{j \in \mathcal{E}_v^+} f_j^* \exp(-\eta(\rho_j - \rho_j^*))} \quad (8)$$

for every  $0 \leq v < n$ , and  $e \in \mathcal{E}_v^+$ . Then,  $\mathcal{G}$  can be easily verified to be locally responsive, and  $f^*$  to be the globally attractive limit flow of the associated dynamical network (4).

### III. STRONG RESILIENCE OF DYNAMICAL NETWORKS

In this section, we shall introduce the notion of strong resilience of a dynamical network, and show that locally responsive policies are maximally robust among the class of distributed routing policies. We shall also provide an explicit simple characterization of the maximal strong resilience of a dynamical network with respect to a given limit flow.

We shall consider persistent perturbations of the dynamical network (4) that reduce the flow functions on the links, as per the following:

**Definition 6 (Admissible Perturbation):** An *admissible perturbation* of a network  $\mathcal{N} = (\mathcal{T}, \mu)$ , satisfying Assumptions 1 and 2, is a network  $\tilde{\mathcal{N}} = (\mathcal{T}, \tilde{\mu})$ , with the same topology  $\mathcal{T}$ , and a family of perturbed flow functions  $\tilde{\mu} := \{\tilde{\mu}_e : \mathbb{R}_+ \rightarrow \mathbb{R}_+\}_{e \in \mathcal{E}}$ , such that, for every  $e \in \mathcal{E}$ ,  $\tilde{\mu}_e$  satisfies Assumption 2, as well as

$$\tilde{\mu}_e(\rho_e) \leq \mu_e(\rho_e), \quad \forall \rho_e \geq 0.$$

We accordingly let  $\tilde{f}_e^{\max} := \sup\{\tilde{\mu}_e(\rho_e) : \rho_e \geq 0\}$ . The *magnitude* of an admissible perturbation is defined as

$$\delta := \sum_{e \in \mathcal{E}} \delta_e, \quad \delta_e := \sup_{\rho_e \geq 0} \{\mu_e(\rho_e) - \tilde{\mu}_e(\rho_e)\}. \quad (9)$$

Given a dynamical network as in Definition 3, and an admissible perturbation as in Definition 6, we shall consider the *perturbed dynamical network*

$$\frac{d}{dt} \tilde{\rho}_e(t) = \tilde{\lambda}_{\sigma(e)}(t) G_e^{\sigma(e)}(\tilde{\rho}(t)) - \tilde{f}_e(t), \quad \forall e \in \mathcal{E} \quad (10)$$

where

$$\begin{aligned} \tilde{f}_e(t) &:= \tilde{\mu}_e(\tilde{\rho}_e(t)) \\ \tilde{\lambda}_v(t) &:= \begin{cases} \sum_{e \in \mathcal{E}_v^-} \tilde{f}_e(t), & \text{if } 0 < v < n \\ \lambda_0, & \text{if } v = 0. \end{cases} \end{aligned} \quad (11)$$

We are now ready to define the notion of strong resilience of a dynamical network as in Definition 3 with respect to a limit flow  $f^*$ .

**Definition 7 (Strong Resilience):** Let  $\mathcal{N}$  be a network satisfying Assumptions 1 and 2,  $\lambda_0 \geq 0$  be a constant outflow at the origin node, and  $\mathcal{G}$  a distributed routing policy. Assume that the corresponding dynamical network has a limit flow  $f^* \in \text{cl}(\mathcal{F})$ . The *strong resilience*  $\gamma_1(f^*, \mathcal{G})$  is equal to the infimum magnitude of all the admissible perturbations for which the perturbed dynamical network (10) is not fully transferring with respect to some initial flow  $f^\circ \in \mathcal{B}(f^*)$ .

Notice that the notion of strong resilience formalized in Definition 7 accounts for the worst-case scenario both with respect to the choice of the admissible perturbation  $\tilde{\mathcal{N}}$ , and of the initial state  $f^\circ$  in the basin of attraction of  $f^*$ . Accordingly, one can provide an adversarial interpretation to the perturbations as explained in [3]. Our first result is an upper bound on the strong resilience of a dynamical network driven by an arbitrary distributed routing policy. In order to state such a result, for a net-




Fig. 1. Network topology used in Example 2.

work  $\mathcal{N}$ , and a flow vector  $f^* \in \text{cl}(\mathcal{F})$ , define the *minimum node residual capacity* as

$$R(\mathcal{N}, f^*) := \min_{0 \leq v < n} \sum_{e \in \mathcal{E}_v^+} (f_e^{\max} - f_e^*). \quad (12)$$

**Theorem 2 (Upper Bound on the Strong Resilience):** Let  $\mathcal{N}$  be a network satisfying Assumptions 1 and 2,  $\lambda_0 \geq 0$  a constant outflow at the origin node, and  $\mathcal{G}$  any distributed routing policy. Assume that the associated dynamical network has a limit flow  $f^* \in \mathcal{F}^*(\lambda_0)$ . Then,

$$\gamma_1(f^*, \mathcal{G}) \leq R(\mathcal{N}, f^*).$$

*Proof:* See Appendix A. ■

The proof of Theorem 2 essentially relies only on the acyclicity of the network topology, and locality of the distributed policy. The intuition is that if a perturbation acts only on the outgoing links of a node, then locality of the routing policy and acyclicity of the network will imply that the node's inflow remains constant at the value of the unperturbed equilibrium. Therefore, if the sum of the outgoing links of the node is below the node inflow at the unperturbed equilibrium, the perturbed network will necessarily have some flow loss, and hence it will not be fully transferring.

On the other hand, in order to show that the upper bound in Theorem 2 is tight for locally responsive policies, we have to rely highly on Properties a) and b) of Definition 5. The following example illustrates the necessity of these properties.

**Example 2:** Consider the topology illustrated in Fig. 1, with  $\lambda_0 = 2$ , flow functions given by

$$\mu_e(\rho_e) = f_e^{\max} (1 - \exp(-a_e \rho_e)) \quad (13)$$

with  $a_1 = a_2 = a_3 = a_4 = 1$  and  $f_{e_1}^{\max} = f_{e_2}^{\max} = 2$ ,  $f_{e_3}^{\max} = f_{e_4}^{\max} = 0.75$ . First consider the case when  $G_{e_1}^0(\rho^0) = 1 - G_{e_2}^0(\rho^0) \equiv 0.75$ , and  $G_{e_3}^1(\rho^1) = 1 - G_{e_4}^1(\rho^1) \equiv 0.5$ . One can verify that the associated dynamical network has a unique equilibrium flow  $f^*$  with  $f_{e_1}^* = 1.5$ ,  $f_{e_2}^* = 0.5$ , and  $f_{e_3}^* = f_{e_4}^* = 0.25$ . Now, consider an admissible perturbation such that  $\tilde{\mu}_{e_1} = 0.7\mu_{e_1}$  and  $\tilde{\mu}_{e_k} = \mu_{e_k}$  for  $k = 2, 3, 4$ . The magnitude of such a perturbation is  $\delta = \delta_{e_1} = 0.6$ . It is easy to see that in this case  $\lim_{t \rightarrow \infty} \tilde{f}_{e_1}(t) = 1.4 = \tilde{f}_{e_1}^{\max}$  which is less than 1.5, which is the flow routed to it. Therefore,  $\lim_{t \rightarrow \infty} \tilde{\lambda}_2(t) = 1.9 < \lambda_0$ , and hence the network is not fully transferring.

Now, consider the same unperturbed network as before, but with distributed routing policy such that  $G_{e_1}^0(\rho^0) = 1 -$

$G_{e_2}^0(\rho^0) = (2e^{-\eta_1 \rho_{e_1}} + e^{\rho_{e_2}})^{-1} 2e^{-\eta_1 \rho_{e_1}}$ , where  $\eta_1 = 0.031$ , and  $\eta_2 = 0.7196$ , and  $G_{e_3}^1(\rho^1) = 1 - G_{e_4}^1(\rho^1) \equiv 0.5$ . One can verify that the associated dynamical network again admits the same  $f^*$  as before as an equilibrium flow. Let us consider the same admissible perturbation as before. One can verify that, for the corresponding perturbed dynamical network

$$\begin{aligned}\lim_{t \rightarrow \infty} \tilde{f}_{e_1}(t) &= 0.4 < \tilde{f}_{e_1}^{\max} = 1.4, \\ \lim_{t \rightarrow \infty} \tilde{f}_{e_2}(t) &= 1.6 < \tilde{f}_{e_2}^{\max} = 2.\end{aligned}$$

However, with an asymptotic inflow of 1.6 at node 1, we have that

$$\begin{aligned}\lim_{t \rightarrow \infty} \tilde{f}_{e_3}(t) &= 0.75 = \tilde{f}_{e_3}^{\max} \\ \lim_{t \rightarrow \infty} \tilde{f}_{e_4}(t) &= 0.75 = \tilde{f}_{e_4}^{\max}.\end{aligned}$$

Therefore,

$$\lim_{t \rightarrow \infty} \tilde{\lambda}_2(t) = 1.9 < \lambda_0$$

and hence the network is not fully transferring.

In both the cases,  $R(\mathcal{N}, f^*) = 1$  and a disturbance of magnitude 0.6 is enough to make the perturbed dynamical network not fully transferring. However, note that in the second case, unlike the first case, the routing policy at node 0 responds to variations in the local flow densities by sending more flow to link  $e_2$ , but it is *overly* responsive in the sense that it sends more flow downstream than the cumulative flow capacity of the links outgoing from node 1. However, by Definition 2, a distributed routing policy is not allowed any information about any other link other than the current flow densities of its outgoing links. This illustrates one of the challenges in designing distributed routing policies which yield  $R(\mathcal{N}, f^*)$  as the strong resilience. Observe that the distributed routing policies used here are not locally responsive, since in the first case  $G^0$  does not satisfy Property b) of Definition 5 and, in the second case, it does not satisfy either Property a) or Property b).

We now state the main technical result of this paper, showing that, for locally responsive distributed routing policies, the strong resilience coincides with the minimal residual node capacity.

**Theorem 3 (Strong Resilience of Locally Responsive Policies):** Let  $\mathcal{N}$  be a network satisfying Assumptions 1 and 2,  $\lambda_0 \geq 0$  a constant outflow at the origin node, and  $\mathcal{G}$  a locally responsive distributed routing policy. Let  $f^* \in \text{cl}(\mathcal{F})$  be the globally attractive limit flow of the associated dynamical network (4). Then,

$$\gamma_1(f^*, \mathcal{G}) = R(\mathcal{N}, f^*).$$

*Proof:* See Appendix B. ■

For a given network  $\mathcal{N}$ , a constant outflow  $\lambda_0$  at the origin node, Theorem 2 and Theorem 3 imply that, among all distributed routing policies such that the dynamical network has a given limit flow  $f^* \in \text{cl}(\mathcal{F})$ , locally responsive policies (for which such limit flow is unique and globally attractive by Theorem 1) have the maximum strong resilience. Moreover, such maximal strong resilience coincides with the minimum node

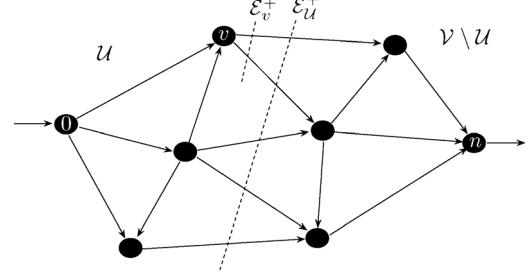


Fig. 2. Comparison between a node-cut and a min-cut.

residual capacity  $R(\mathcal{N}, f^*)$ , and hence it depends both on the network  $\mathcal{N}$ , and on the limit flow  $f^*$  of the unperturbed network.

A few remarks are in order. First, it is worth comparing the maximum strong resilience  $R(\mathcal{N}, f^*)$  achievable on a network  $\mathcal{N}$  by any distributed policy with limit flow  $f^*$ , with the maximum achievable weak resilience. The latter was studied in [3] and was shown (see Definition 6, Proposition 1, and Theorem 2 therein) to be equal to the min-cut capacity of the network,  $C(\mathcal{N})$ . Clearly,  $R(\mathcal{N}, f^*) \leq C(\mathcal{N})$ . In fact, a stronger general result can be proven. For this, consider an O-D cut-set  $\mathcal{U}$  achieving the minimum in the right-hand side of (3). Observe that  $\sum_{e \in \mathcal{E}_{\mathcal{U}}^+} f_e^* = \lambda_0$  by conservation of mass. Then, let  $v = \max \mathcal{U}$  be the node in  $\mathcal{U}$  with the largest label, and notice that, since (2) implies that all the outgoing links of  $v$  are pointing towards nodes with higher label, one has that  $\mathcal{E}_v^+ \subseteq \mathcal{E}_{\mathcal{U}}^+$  (see Fig. 2). Hence, it follows from (12) that

$$\begin{aligned}R(\mathcal{N}, f^*) &\leq \sum_{e \in \mathcal{E}_v^+} (f_e^{\max} - f_e^*) \\ &\leq \sum_{e \in \mathcal{E}_{\mathcal{U}}^+} (f_e^{\max} - f_e^*) \\ &= C(\mathcal{N}) - \lambda_0.\end{aligned}$$

We provide below two examples to illustrate the difference between the two quantities.

**Example 3:** For parallel link topologies, an example of which is illustrated in Fig. 3(a), one has that

$$R(\mathcal{N}, f^*) = \sum_{e \in \mathcal{E}} f_e^{\max} - \lambda_0 = C(\mathcal{N}) - \lambda_0.$$

**Example 4:** Consider the topology shown in Fig. 3(b) with  $\lambda_0 = 1$ ,  $f^* = [\epsilon, 1 - \epsilon, \epsilon, 1 - \epsilon]$  and  $f_e^{\max} = [1/\epsilon, 1, 1/\epsilon, 1]$  for some  $\epsilon \in (0, 1)$ . In this case, we have that  $C(\mathcal{N}) = 1 + 1/\epsilon$  and  $R(\mathcal{N}, f^*) = \epsilon$ . Therefore,

$$C(\mathcal{N}) - R(\mathcal{N}, f^*) = 1 + \frac{1}{\epsilon} - \epsilon$$

and hence  $C(\mathcal{N}) - R(\mathcal{N}, f^*)$  grows unbounded as  $\epsilon$  vanishes.

We conclude this section with the following observation. Using arguments along the lines of those employed in [4], one can show that  $C(\mathcal{N}) - \lambda_0$  provides an upper bound on the strong resilience even if the locality constraint on the information used by the routing policies is removed, i.e., if one allows  $G^v$  to depend on the full vector of current densities  $\rho$ , rather than on the local density vector  $\rho^v$  only. Indeed, one

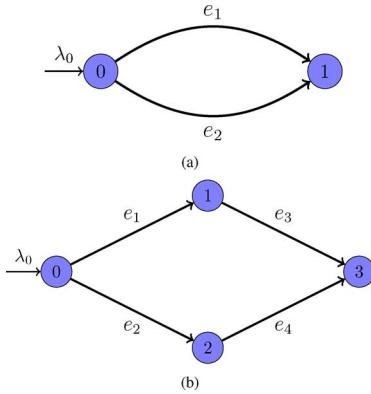


Fig. 3. (a) A parallel link topology. (b) A topology to illustrate arbitrarily large  $C(\mathcal{N}) - R(\mathcal{N}, f^*)$ .

can exhibit routing policies which are functions of the global density information  $\rho$ , for which the strong resilience is exactly  $C(\mathcal{N}) - \lambda_0$  using ideas developed in the paper [4]. Hence, one may interpret the gap between  $C(\mathcal{N}) - \lambda_0$  and  $R(\mathcal{N}, f^*)$  as the strong resilience loss due to the locality constraint on the information available to the distributed routing policy. One could use Example 4 to again demonstrate arbitrarily large such loss. This dependence of the strong resilience on the availability of information is in stark contrast to our result on weak resilience in [3], where we showed that the weak resilience is unaffected by local information constraints on the routing policies. In fact, it would be worth investigating the impact on the network strong resilience of intermediate levels of constraints on the information available to the routing policies, interpolating between the one-hop information of our current modeling of the distributed routing policies, and the global information described above. However, this issue is not addressed here, but rather left as a topic for future work.

#### IV. ROBUST EQUILIBRIUM SELECTION

In this section, for a given network  $\mathcal{N}$  satisfying Assumptions 1 and 2, and a constant outflow  $\lambda_0 \in [0, C(\mathcal{N})]$  at the origin node, we shall address the issue of optimizing the minimum node residual capacity  $R(\mathcal{N}, f^*)$  with respect to  $f^*$ . First, in Section IV-A, we shall address the issue of maximizing  $R(f^*) := R(\mathcal{N}, f^*)$  over all admissible equilibrium flow vectors  $f^* \in \mathcal{F}^*(\lambda_0)$ , i.e., with the only constraints given by the link capacities and the conservation of mass at nodes. Then, in Section IV-B we shall focus on the problem of implementing a desired equilibrium flow  $f^*$ , assuming that  $f^*$  satisfies the additional constraint of being the Wardrop equilibrium induced by some static tolls. In Section IV-C, we shall evaluate the gap between the maximum of  $R(f^*)$  over all  $f^*$ , and a generic equilibrium  $f^*$ , and interpret it as the robustness price of anarchy with respect to  $f^*$ . We then distinguish between  $R(f^*)$  and the commonly used metric of average delay associated to  $f^*$ , and then propose a convex optimization problem to solve for  $f^*$  that takes into account average delay as well as strong resilience.

##### A. Robust Equilibrium Flow Selection as an Optimization Problem

The robust equilibrium flow selection problem can be posed as an optimization problem as follows:

$$R^* := \sup_{f^* \in \mathcal{F}^*(\lambda_0)} R(f^*) \quad (14)$$

where we recall that  $\mathcal{F}^*(\lambda_0)$  is the set of admissible equilibrium flow vectors corresponding to the outflow  $\lambda_0 \in [0, C(\mathcal{N})]$  at the origin node. Equation (12) implies that  $R(f^*)$  is the minimum of a set of functions linear in  $f^*$ , and hence is concave in  $f^*$ . Since the closure of the constraint set  $\mathcal{F}^*(\lambda_0)$  is a polytope, we get that the optimization problem stated in (14) is equivalent to a simple convex optimization problem. However, note that the objective function,  $R(f^*)$  is non-smooth and one needs to use sub-gradient techniques, e.g., see [16], for finding the optimal solution.

##### B. Using Tolls for Equilibrium Implementation in Traffic Networks

We now study the use of static tolls to influence the decisions of the drivers in order to get a desired emergent equilibrium flow for (unperturbed) traffic networks. The static tolls can be modeled to affect the driver decisions over a slower time scale (with respect to the one of the dynamics (4)), at which the drivers update their preferences for global paths through the network. These global decisions are complemented by the *fast-scale* node-wise route choice decisions characterized by Definition 2 and 5. The details of the analysis of traffic networks with such two time-scale driver decisions can be found in our companion paper [4]. In particular, it is shown in [4] that, if the two time scales are sufficiently separated apart, then the network densities are attracted to a neighborhood of the Wardrop equilibrium. In this section, in order to highlight the relationship between static tolls and the resultant equilibrium flow, we assume that the fast scale dynamics equilibrates quickly and focus only on the slow scale dynamics.

We briefly describe the congestion game framework for traffic networks to formalize the equilibrium corresponding to the slow scale driver decision dynamics. Let  $\Upsilon \in \mathcal{R}$  be a link-wise vector of tolls, with  $\Upsilon_e$  denoting the toll on link  $e$ . Assuming that  $\Upsilon$  is rescaled in such a way that one unit of toll corresponds to a unit amount of delay, the utility of a driver associated with link  $e$  when the flow on it is  $f_e$  is

$$-(T_e(f_e) + \Upsilon_e)$$

where  $T_e(f_e)$  is the delay on link  $e$  when the flow on it is  $f_e$ . In order to formally describe the delay functions  $T_e(f_e)$ , we shall assume that each flow function  $\mu_e$  satisfies Assumption 2, and additionally is strictly concave and satisfies  $\mu'_e(0) < +\infty$ . Observe that the flow function described in (13) satisfies these additional assumptions. Since the flow on a link is the product

of speed and density on that link, one can define the link-wise delay functions  $T_e(f_e)$  by

$$T_e(f_e) := \begin{cases} +\infty, & \text{if } f_e \geq f_e^{\max}, \\ \frac{\mu_e^{-1}(f_e)}{f_e}, & \text{if } f_e \in (0, f_e^{\max}), \\ \frac{1}{\mu'_e(0)}, & \text{if } f_e = 0, \end{cases} \quad \forall e \in \mathcal{E}. \quad (15)$$

Let  $\mathcal{P}$  be the set of distinct paths from node 0 to node  $n$ , and  $A \in \{0, 1\}^{\mathcal{E} \times \mathcal{P}}$ , where  $A_{ep} = 1$  if and only if  $e \in p$ , be the link-path incidence matrix of the topology  $\mathcal{T}$ . Let  $T(f) = \{T_e(f_e) : e \in \mathcal{E}\}$  be the vector of link-wise delay functions. The utility associated to a path  $p \in \mathcal{P}$  is  $-(A'(T(f)) + \Upsilon)_p$ .

We are now ready to define a toll-induced equilibrium.

**Definition 8 (Toll-Induced Equilibrium):** Let  $\Pi$  be the set of probability vectors over  $\mathcal{P}$ . For a given  $\Upsilon \in \mathcal{R}$ , a toll-induced equilibrium is a vector  $f^*(\Upsilon) \in \mathcal{F}^*$  for which there exists  $\pi \in \Pi$  satisfying  $A\pi = f^*(\Upsilon)$  and, for all  $p \in \mathcal{P}$

$$\pi_p > 0 \Rightarrow (A'(T(A\pi) + \Upsilon))_p \leq (A'(T(A\pi) + \Upsilon))_q \quad \forall q \in \mathcal{P}. \quad (16)$$

Equation (16) states that a toll-induced equilibrium is the image through the link-path incidence matrix  $A$  of a probability vector  $\pi \in \Pi$  whose support consists only of those paths  $p \in \mathcal{P}$  for which the associated utility  $-(A'(T(A\pi) + \Upsilon))_p$  is greater than or equal to the utility  $-(A'(T(A\pi) + \Upsilon))_q$  associated to any other path  $q \in \mathcal{P}$ . The intuition behind this definition is that a path whose utility is strictly dominated by the one associated to some other path cannot be chosen by a non-negligible fraction of flow. Note that  $f^*(\mathbf{0})$ , where  $\mathbf{0} \in \mathbb{R}^{\mathcal{E}}$  stands for the all-zero vector, corresponds to the Wardrop equilibrium, e.g., see [17], [18]. For brevity in notation, we shall denote the Wardrop equilibrium by  $f^W$ . The following result guarantees the existence and uniqueness of a toll-induced equilibrium.

**Proposition 1 (Toll-Induced Equilibrium):** Let  $\mathcal{N}$  be a network satisfying Assumptions 1 and 2 and  $\lambda_0 \in [0, C(\mathcal{N})]$  a constant outflow at the origin node. Assume additionally that the flow function  $\mu_e$  is strictly concave and satisfies  $\mu'_e(0) < +\infty$  for every link  $e \in \mathcal{E}$ . Then, for every toll vector  $\Upsilon \in \mathcal{R}$ , there exists a unique toll-induced equilibrium  $f^*(\Upsilon) \in \mathcal{F}^*$ .

*Proof:* It follows from Assumption 2, strict concavity and the assumption  $\mu'_e(0) < +\infty$  on the flow functions that, for all  $e \in \mathcal{E}$ , the delay function  $T_e(f_e)$ , as defined by (15), is continuous, strictly increasing, and is such that  $T_e(0) > 0$ . The Proposition then follows by applying Theorems 2.4 and 2.5 from [19]. ■

In this subsection, to illustrate the proof of concept, we will focus on equilibrium flows  $f^*$  each of whose components is strictly positive. The results for a generic  $f^* \in \mathcal{F}^*(\lambda_0)$  follow along similar lines. Definition 8 implies that for  $f^*(\Upsilon) \in \mathcal{R}$ , with  $f_e^*(\Upsilon) > 0$  for all  $e \in \mathcal{E}$ , to be the toll-induced equilibrium corresponding to the toll vector  $\Upsilon \in \mathcal{R}$  is equivalent to  $A'(T(f^*(\Upsilon)) + \Upsilon) = \nu \mathbf{1}$ , for some  $\nu > 0$ . We shall use this fact in the next result, where we compute tolls to get a desired equilibrium.

**Proposition 2 (Tolls for Desired Equilibrium):** Let  $\mathcal{N}$  be a network satisfying Assumptions 1 and 2 and  $\lambda_0 \in [0, C(\mathcal{N})]$  a constant outflow at the origin node. Assume additionally that the

flow function  $\mu_e$  is strictly concave and satisfies  $\mu'_e(0) < +\infty$  for every link  $e \in \mathcal{E}$ . Assume that the Wardrop equilibrium  $f^W$  is such that  $f_e^W > 0$  for all  $e \in \mathcal{E}$ . Let  $f^* \in \mathcal{F}^*(\lambda_0)$ , with  $f_e^* > 0$  for all  $e \in \mathcal{E}$ , be the desired toll-induced equilibrium flow vector. Define  $\Upsilon(f) \in \mathcal{R}$  by

$$\Upsilon(f) = \left( \max_{e \in \mathcal{E}} \frac{T_e(f_e)}{T_e(f_e^W)} \right) T(f^W) - T(f). \quad (17)$$

Then  $f^*$  is the desired toll-induced equilibrium associated to the toll vector  $\Upsilon(f^*)$ .

*Proof:* Since  $f^W$  is the Wardrop equilibrium, corresponding to the toll vector  $\Upsilon = \mathbf{0}$ , we have that

$$A'T(f^W) = \nu_1 \mathbf{1} \quad (18)$$

for some  $\nu_1 > 0$ . For  $f^*$  to be the toll-induced equilibrium associated to the toll vector  $\Upsilon \in \mathcal{R}$ , one needs to find  $\nu_2 > 0$  such that

$$A'(T(f^*) + \Upsilon) = \nu_2 \mathbf{1}. \quad (19)$$

Using (18) and simple algebra, one can verify that (19) is satisfied with  $\Upsilon(f^*)$  as defined in (17) and  $\nu_2 = \nu_1 \max\{T_e(f_e^*)/T_e(f_e^W) : e \in \mathcal{E}\}$ . ■

**Remark 3:** The toll vector yielding a desired equilibrium flow is not unique. In fact, any toll of the form  $\Upsilon(f^*) = cT(f^W) - T(f^*)$ , with  $c \geq \max\{T_e(f_e^*)/T_e(f_e^W) : e \in \mathcal{E}\}$  will induce  $f^*$  as the toll-induced equilibrium. Proposition 2 gives just one such toll vector.

### C. Robustness Price of Anarchy

Conventionally, traffic networks have been viewed as static, where a given equilibrium traffic flow is the outcome of driver's selfish behavior in response to the delays associated with various paths and the incentive mechanisms in place. The price of anarchy [10] has been suggested as a metric to measure how suboptimal a given equilibrium is with respect to the societal optimal equilibrium, where societal optimality is usually measured in terms of the average delay faced by the driver population. In the context of robustness analysis of traffic networks, it is also natural to consider societal optimality from the robustness point of view, thereby motivating a notion of the robustness price of anarchy. Formally, for a  $f^* \in \mathcal{F}^*(\lambda_0)$ , define the robustness price of anarchy as  $P(f^*) := R^* - R(f^*)$ , where  $R^*$  is defined in (14). It is worth noting that, for a parallel topology, we have that  $R^* = R(f^*) = \sum_{e \in \mathcal{E}} f_e^{\max} - \lambda_0$  for all  $f^*$ . That is, the strong resilience is independent of the equilibrium operating condition and hence, for a parallel topology,  $P(f^*) \equiv 0$ . However, for a general topology and a general equilibrium, this quantity is nonzero. This can be easily justified, for example, for robustness price of anarchy with respect to the Wardrop equilibrium: a Wardrop equilibrium is determined by the delay functions  $T_e(f_e)$  as well as the topology of the network, whereas the maximizer of  $R(f^*)$  depends only on the topology and the link-wise flow capacities of the network, as implied by the optimization problem in (14). In fact, as the following example illustrates, for a nonparallel topology, the robustness price of

anarchy with respect to Wardrop equilibrium can be arbitrarily large.

*Example 5 (Arbitrarily Large Robustness Price of Anarchy):* Consider the network topology shown in Fig. 1. Let the link-wise flow functions be given by (13). The delay function is then given by

$$T_e(f_e) = \begin{cases} (a_e f_e^{\max})^{-1}, & \text{if } f_e = 0 \\ -\frac{1}{a_e f_e} \log \left( 1 - \frac{f_e}{f_e^{\max}} \right), & \text{if } 0 < f_e < f_e^{\max} \\ +\infty, & \text{if } f_e \geq f_e^{\max}. \end{cases}$$

Fix some  $\epsilon \in (0, 1)$  and let  $\lambda_0 = 1/\epsilon$ . Let the parameters of the flow functions be given by

$$\begin{aligned} f_{e_1}^{\max} = f_{e_2}^{\max} &= \frac{1}{\epsilon} + \epsilon, & f_{e_3}^{\max} = f_{e_4}^{\max} &= \frac{1}{(2\epsilon)} + \frac{\epsilon}{2} \\ a_1 = 1, \quad a_2 = a_3 = a_4 &= \frac{\frac{3\epsilon}{1-\epsilon} \log \left( \frac{\epsilon+\epsilon^2}{1+\epsilon^2} \right)}{\log \left( \frac{1+\epsilon^2-\epsilon}{1+\epsilon^2} \right)}. \end{aligned}$$

For these values of the parameters, one can verify that the unique Wardrop equilibrium is given by

$$f^W = [1 \quad \frac{1}{\epsilon} - 1 \quad \frac{1}{(2\epsilon)} - \frac{1}{2} \quad \frac{1}{(2\epsilon)} - \frac{1}{2}]^T.$$

The strong resilience of  $f^W$  is then given by

$$R(\mathcal{N}, f^W) = \min \left\{ \frac{2}{\epsilon} + 2\epsilon - \frac{1}{\epsilon}, \frac{1}{\epsilon} + \epsilon - \left( \frac{1}{\epsilon} - 1 \right) \right\} = 1 + \epsilon.$$

One can also verify that, for this case,  $R^* = 1/\epsilon + 2\epsilon$  which would correspond to  $f^* = [1/\epsilon \quad 0 \quad 0 \quad 0]^T$ . Therefore,

$$P(f^W) = \frac{1}{\epsilon} + 2\epsilon - (1 + \epsilon) = \frac{1}{\epsilon} + \epsilon - 1$$

which tends to infinity as  $\epsilon$  approaches 0.

The above example provides a strong motivation to take robustness into account while selecting the equilibrium operating condition for the network. However, conventionally, the equilibrium selection problem for traffic networks has been primarily motivated from the point-of-view of minimizing average delay. The average delay associated with an equilibrium  $f^*$  is defined as

$$D(f^*) := \frac{1}{\lambda_0} \sum_{e \in \mathcal{E}} f_e^* T_e(f_e^*). \quad (20)$$

The following simple example illustrates that the maximizers of  $-D(f^*)$  and  $R(f^*)$  are not necessarily the same.

*Example 6:* Consider the network topology shown in Fig. 1. Let the link-wise flow functions be given by (13). Let the parameters of the flow function be given by:  $a_{e_1} = 0.01$ ,  $a_{e_2} = a_{e_3} = a_{e_4} = 10$ , and  $f_{e_1}^{\max} = f_{e_2}^{\max} = 2$ ,  $f_{e_3}^{\max} = f_{e_4}^{\max} = 0.75$ . Let  $\lambda_0 = 2$ . The equilibrium maximizing  $R(f^*)$  is  $f^* = [2 \quad 0 \quad 0 \quad 0]^T$  and the maximum strong resilience is found to be  $R^* = 1.5$ . The minimum value of  $D(f^*)$  over all  $f^* \in \mathcal{F}^*(\lambda_0)$  is 15.17, and the corresponding equilibrium  $f^*$  and the value of strong resilience are  $[0.5 \quad 1.5 \quad 0.75 \quad 0.75]^T$  and 0.5, respectively. Note that the maximizers of  $-D(f^*)$  and  $R(f^*)$  are not the same. Therefore, a reasonable optimization problem should take into account

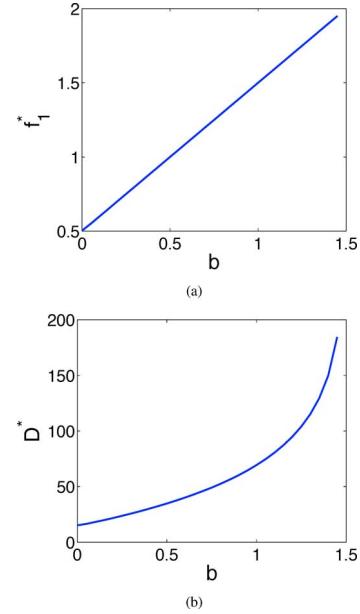


Fig. 4. Plots of the solution of the optimization in (21) for parameters specified in Example 6, as  $b$  is increased from 0 to  $R^* = 1.5$ : (a)  $f_1^*$  is the flow on link  $e_1$  corresponding to  $f^*$  optimizing (21); note that  $f_2^* = \lambda_0 - f_1^*$ , and  $f_3^* = f_4^* = f_2^*/2$ , (b)  $D^*$  is the solution of (21).

average delay as well as network resilience. Accordingly, we propose a modified optimization problem as follows:

$$\begin{aligned} &\text{minimize} && D(f^*) \\ &\text{subj. to} && f^* \in \mathcal{F}^*(\lambda_0), = \\ & && R(f^*) \geq b \end{aligned} \quad (21)$$

where  $b \in [0, R^*]$ . Assumption 2 and (20) imply that  $D(f^*)$  is convex. Therefore, taking into account the expression for  $R(f^*)$ , (21) is still a convex optimization problem. Fig. 4 plots the outcome of this optimization as  $b$  is varied from 0 to  $R^*$ . In all the cases, we solved (21) using CVX, a package for specifying and solving convex programs [20].

## V. CASCADED FAILURES

In this section, through numerical experiments, we study the case when the flow functions are set to the ones commonly accepted in the road traffic literature, e.g., see [21]. In such literature, the flow functions are defined over a finite interval  $[0, \rho_e^{\max}]$ , where  $\rho_e^{\max}$  is the maximum traffic density that link  $e$  can handle. Additionally,  $\mu_e$  is assumed to be strictly concave and achieves its maximum in  $(0, \rho_e^{\max})$ . As an example, consider the following flow function:

$$\mu_e(\rho_e) = \frac{4f_e^{\max}\rho_e(\rho_e^{\max} - \rho_e)}{(\rho_e^{\max})^2}, \quad \rho_e \in [0, \rho_e^{\max}]. \quad (22)$$

Accordingly, the link-wise flow dynamics in (4) is replaced by

$$\frac{d}{dt} \rho_e = \chi_{\sigma(e)} \lambda_{\sigma(e)} G_e^{\sigma(e)} \left( \rho^{\sigma(e)} \right) - \chi_{\tau(e)} f_e \quad (23)$$

where

$$\chi_v := 1 - \prod_{e \in \mathcal{E}_v^+} (1 - \xi_e), \quad \xi_e := \mathbb{1}_{[0, \rho_e^{\max}]}(\rho_e)$$

are the activation status indicators of a node  $v \in \mathcal{V}^1$  and a link  $e \in \mathcal{E}$ . An important implication of the finite capacity on the traffic densities is the possibility of cascaded *spill-backs* traveling upstream as follows. When the density on a link reaches its capacity, its outflow permanently becomes zero and hence the link is effectively cut out from the network. When all the outgoing links from a particular node are cut out, it makes the outflow on all the incoming links to that node zero. Eventually, these *upstream* links might possibly reach their capacity on the density and cutting themselves off permanently and cascading the effect further upstream. We shall show how such cascaded effects affect resilience of the network.

Specifically, we study the effect of the flow functions given by (22) on the *weak resilience* of the network, which was formally defined in [3]. In simple words, weak resilience of the network is defined as the infimum sum of the link-wise magnitude of all the disturbances under which the outflow from the destination node is asymptotically zero. In [3, Prop. 1], we showed that the weak resilience of the dynamical network with the flow functions satisfying Assumption 2 is upper bounded by its min-cut capacity. It is easy to show that this upper bound on weak resilience also holds when the flow functions are the ones given by (22).

For the simulations, we selected the following parameters:

- the graph topology  $\mathcal{T}$  shown in Fig. 5.
- $\lambda_0 = 3$ .
- $\rho_e^{\max} = 3$  for all  $e \in \mathcal{E}$ , and flow capacities are given by  $f_{e_1}^{\max} = f_{e_2}^{\max} = f_{e_3}^{\max} = 2.5$ ,  $f_{e_4}^{\max} = 0.9$ ,  $f_{e_5}^{\max} = 1.75$ ,  $f_{e_6}^{\max} = f_{e_7}^{\max} = f_{e_8}^{\max} = 1$ ,  $f_{e_9}^{\max} = f_{e_{10}}^{\max} = f_{e_{11}}^{\max} = 0.4$ ,  $f_{e_{12}}^{\max} = f_{e_{13}}^{\max} = 1.5$ ,  $f_{e_{14}}^{\max} = 2$ , and  $f_{e_{15}}^{\max} = 1.6$ . The link-wise flow functions are as given in (22), if  $e \in \mathcal{E}_n^-$  or if  $\rho < \rho_e^{\max}$  for at least one *downstream* edge  $e'$ , i.e.,  $e' \in \mathcal{E}$  such that  $e \in \mathcal{E}_v^-$  and  $e' \in \mathcal{E}_v^+$  for some  $v \in \{1, \dots, n-1\}$ , and the flow functions are uniformly zero otherwise;
- the equilibrium flow  $f^*$  has components  $f_{e_1}^* = f_{e_3}^* = f_{e_6}^* = 0.5$ ,  $f_{e_2}^* = 2$ ,  $f_{e_4}^* = f_{e_{13}}^* = 0.3$ ,  $f_{e_5}^* = 1.5$ ,  $f_{e_7}^* = f_{e_8}^* = 0.25$ ,  $f_{e_9}^* = 0.2$ ,  $f_{e_{10}}^* = f_{e_{12}}^* = 0.9$ ,  $f_{e_{11}}^* = 0.2$ ,  $f_{e_{13}}^* = 0.3$ ,  $f_{e_{14}}^* = 1.1$ , and  $f_{e_{15}}^* = 0.7$ ;
- the route choice function is as follows:

$$G_e^v(\rho^v) = \frac{f_e^* \exp(-\eta(\rho_e - \rho_e^*)) \mathbb{1}_{[0, \rho_e^{\max}]}(\rho_e)}{\sum_{j \in \mathcal{E}_v^+} f_j^* \exp(-\eta(\rho_j - \rho_j^*)) \mathbb{1}_{[0, \rho_j^{\max}]}(\rho_j)}$$

where  $\eta$  will be a variable parameter for the simulations.

Note that this is a modified version of the route choice function given by (8). The modification is done to respect the finite traffic density constraint on the links.

One can verify that, with these parameters, the maximum flow capacity of the network, and hence an upper bound on the weak resilience, is 5.2.

Consider an admissible disturbance such that  $\tilde{\mu}_{e_4} = (2/9)\mu_{e_4}$ ,  $\tilde{\mu}_{e_5} = (23/35)\mu_{e_5}$ ,  $\tilde{\mu}_{e_6} = (4/5)\mu_{e_6}$ ,  $\tilde{\mu}_{e_7} = (2/7)\mu_{e_7}$ ,  $\tilde{\mu}_{e_8} = (2/7)\mu_{e_8}$ ,  $\tilde{\mu}_{e_9} = (1/2)\mu_{e_9}$ ,  $\tilde{\mu}_{e_{10}} = (3/5)\mu_{e_{10}}$ ,  $\tilde{\mu}_{e_{12}} = (8/15)\mu_{e_{12}}$  and  $\tilde{\mu}_k = \mu_k$  for  $k = \{1, 2, 3, 11, 13, 14, 15\}$ . As result,  $\delta_{e_4} = 0.7$ ,  $\delta_{e_5} = 0.6$ ,  $\delta_{e_6} = 0.2$ ,  $\delta_{e_7} = 0.5$ ,  $\delta_{e_8} = 0.5$ ,  $\delta_{e_9} = 0.2$ ,  $\delta_{e_{10}} = 0.6$ ,

<sup>1</sup>Here, we are adopting the nonstandard convention that an empty product equals 0 so that  $\chi_n(t) = 1$  for all  $t$ .

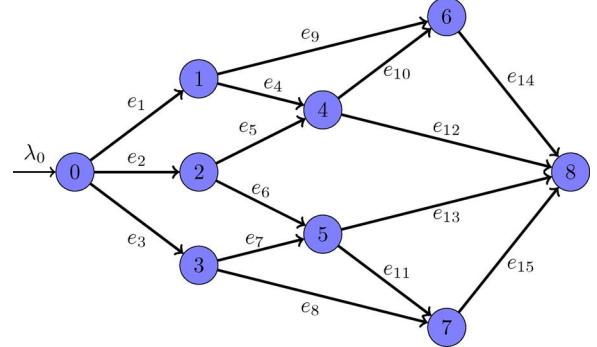


Fig. 5. Graph topology used in simulations.

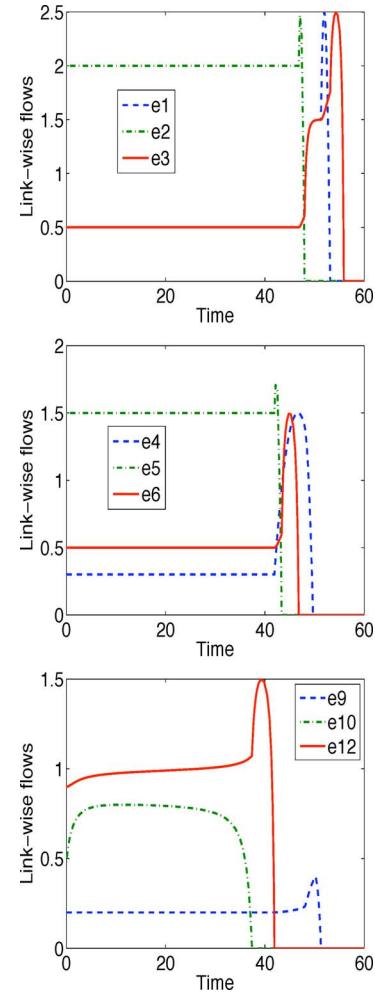


Fig. 6. Plot of link-wise flows for some of the links of the network that ultimately shut down. The timings of shut downs of the links demonstrate the cascaded effect starting from link  $e_{10}$  and traveling up to the origin node.

$\delta_{e_{12}} = 0.7$  and  $\delta_{e_k} = 0$  for  $k = \{1, 2, 3, 11, 13, 14, 15\}$ . Therefore,  $\delta = 4$ , which is less than the min-cut flow capacity of the network. For this case, it is observed that,  $\lim_{t \rightarrow \infty} \lambda_{e_8}(t) = 0$  independent of the value of  $\eta$ . This can be explained as follows. For the given disturbance, we have that  $\tilde{f}_{e_{10}}^{\max} + \tilde{f}_{e_{12}}^{\max} = 1.7 < 1.8 = f_{e_{10}}^* + f_{e_{12}}^*$ . Therefore, after finite time  $t_1$ , we have that  $\tilde{\rho}_{e_{10}}(t) = \rho_{e_{10}}^{\max}$  and  $\tilde{\rho}_{e_{12}}(t) = \rho_{e_{12}}^{\max}$  for all  $t \geq t_1$ . As a consequence, we have that,  $f_{e_4}(t) = 0$  and  $\tilde{f}_{e_5}(t) = 0$  for all  $t \geq t_1$ . One can repeat this argument to conclude that, for the given disturbance, after finite time,

$\tilde{\rho}_{e_k}$  for  $k = 1, \dots, 9$  reach and remain at their maximum density capacities. As a consequence, after such a finite time,  $\tilde{f}_{e_1}(t) + f_{e_2}(t) + \tilde{f}_{e_3}(t) = 0$  and hence,  $\lim_{t \rightarrow \infty} \lambda_{e_8}(t) = 0$ , i.e., the network is not partially transferring. This is also illustrated in Fig. 6 which plots the flow through some of the links of the network as a function of time. This example illustrates that the cascaded effects can potentially reduce the weak resilience of a dynamical network.

Preliminary simulations also suggest that the strong resilience of the dynamical network given by (23) could be strictly greater than the minimum node residual capacity in some instances, e.g., see [5]. A rigorous resilience analysis as well as the design of robust control policies for this model is an ongoing work.

## VI. CONCLUSION

In this paper, we studied strong resilience of dynamical networks, with respect to perturbations that reduce the flow functions on the links of the network. We showed that locally responsive distributed routing policies yield the maximum strong resilience under local information constraint. We also showed that the corresponding strong resilience is equal to the minimum node residual capacity of the network, and hence depends on the limit flow of the unperturbed network. Our results show that, unlike the weak resilience which was considered in [3], the strong resilience of a dynamical network is sensitive to local information constraints. We proposed simple convex optimization problems to solve for equilibria that maximize traditional metrics of social optimality such as average delay subject to guarantees on strong resilience. We derived a class of link-wise tolls that implement a desired limit flow for an unperturbed traffic network, thereby giving the system planner an additional control mechanism to achieve desired performance from the traffic network. Finally, we also discussed cascaded failures due to spill backs when we impose finite density constraints on the links. The findings of this and the companion paper [3] stand to provide important guidelines for management of several large-scale critical infrastructures both from planning as well as real-time operation point of view.

In future, we plan to extend the research in several directions. We plan to rigorously study robustness properties of networks with finite link-wise capacity for density, and formally establish the results on resilience as suggested by the simulations in Section V. In this setting, the outflow function of a link depends on the density on that link as well as the saturation status of downstream links. The weak resilience is upper bounded by network residual capacity, i.e.,  $C(\mathcal{N}) - \lambda_0$  and can be strictly less than that due to the possibility of cascaded failures, as suggested by the simulations in Section V. The corresponding maximally resilient routing policy will be modified versions of locally responsive policies, as defined in Definition 5, that possibly require additional information about the maximum capacities on density and flow as well as the densities corresponding to the maximum flow. We plan to study the scaling of the resilience with respect to the amount of information, e.g., multi-hop as opposed to just single-hop, available to the routing policies. We

also plan to perform robustness analysis in a probabilistic framework to complement the adversarial framework of this paper. The locally responsive routing policy considered in this paper is expected to be maximally resilient even in the probabilistic setting; however, the exact characterization of resiliences will be different. We also plan to consider a setting with buffer capacities on the nodes and study the scaling of the resilience with such buffer capacities. We also plan to consider more general graph topologies, e.g., graphs having cycles and multiple origin-destination pairs. In this case, an upper bound on the resilience can be obtained by deriving appropriate diffusivity results (cf. Lemma 1 in the appendix) for the static network flow formulation, i.e., when inflow and outflow on a link are the same, and when the routing policy at a node can measure the magnitude of disturbance on the outgoing links. The challenge then lies in designing routing policy for the dynamic formulation that can emulate the diffusivity properties of the static formulation as closely as possible.

## APPENDIX A PROOF OF THEOREM 2

In this section, we shall prove Theorem 2 by showing that, given a network  $\mathcal{N}$  satisfying Assumptions 1 and 2, a constant outflow  $\lambda_0 \geq 0$  at the origin node, a distributed routing policy  $\mathcal{G}$ , and a limit flow  $f^* \in \text{cl}(\mathcal{F})$  for the associated dynamical network (4), the strong resilience satisfies

$$\gamma_1(f^*, \mathcal{G}) \leq R(\mathcal{N}, f^*).$$

Let  $f^\circ \in \mathcal{B}(f^*)$  be some initial flow in the basin of attraction of  $f^*$ . In order to prove the result, it is sufficient to exhibit a family of admissible perturbations, with magnitude  $\delta$  arbitrarily close to  $R(\mathcal{N}, f^*)$ , under which the network is not fully transferring with respect to  $f^\circ$ . Let us fix some non-destination node  $0 \leq v < n$  minimizing the right-hand side of (12), and put  $\kappa := \sum_{e \in \mathcal{E}_v^+} f_e^{\max}$ . For any  $R(\mathcal{N}, f^*) < \delta < \kappa$ , consider the admissible perturbation defined by

$$\begin{aligned} \tilde{\mu}_e(\rho_e) &:= \frac{\kappa - \delta}{\kappa} \mu_e(\rho_e), \quad \forall e \in \mathcal{E}_v^+ \\ \tilde{\mu}_e(\rho_e) &:= \mu_e(\rho_e), \quad \forall e \in \mathcal{E} \setminus \mathcal{E}_v^+. \end{aligned} \quad (24)$$

Clearly, the magnitude of such perturbation equals  $\delta$ .

Let us consider the O-D cut-set that partitions  $\mathcal{V}$  into  $\mathcal{U} := \{0, 1, \dots, v\}$  and  $\mathcal{V} \setminus \mathcal{U}$ , and recall that

$$\mathcal{E}_{\mathcal{U}}^+ = \{(u, w) \in \mathcal{E} : 0 \leq u \leq v, v < w \leq n\}.$$

Observe that, thanks to Assumption 1 on the acyclicity of the network topology, since all the links outgoing from some node  $u < v$  are unaffected by the perturbation, the associated perturbed dynamical network (10) with initial flow  $\tilde{f}(0) = f^\circ \in \mathcal{B}(f^*)$  satisfies

$$\lim_{t \rightarrow \infty} \tilde{f}_e(t) = \lim_{t \rightarrow \infty} f_e(t) = f_e^*, \quad \forall e \in \mathcal{E}_u^+, \quad \forall 0 \leq u < v.$$

On the other hand, one has that

$$\tilde{f}_e(t) < \tilde{f}_e^{\max} = \frac{\kappa - \delta}{\kappa} f_e^{\max}, \quad \forall e \in \mathcal{E}_v^+, \quad \forall t \geq 0.$$

Therefore, one has that

$$\begin{aligned} \limsup_{t \rightarrow \infty} \sum_{e \in \mathcal{E}_{\mathcal{U}}^+} \tilde{f}_e(t) &\leq \sum_{e \in \mathcal{E}_v^+} \tilde{f}_e^{\max} + \sum_{e \in \mathcal{E}_{\mathcal{U}}^+ \setminus \mathcal{E}_v^+} f_e^* \\ &= \frac{\kappa - \delta}{\kappa} \sum_{e \in \mathcal{E}_v^+} f_e^{\max} + \sum_{e \in \mathcal{E}_{\mathcal{U}}^+ \setminus \mathcal{E}_v^+} f_e^* \\ &= \sum_{e \in \mathcal{E}_v^+} f_e^{\max} - \delta - \sum_{e \in \mathcal{E}_v^+} f_e^* + \sum_{e \in \mathcal{E}_v^+} f_e^* \\ &= R(\mathcal{N}, f^*) - \delta + \lambda_0. \end{aligned} \quad (25)$$

Observe that, for every  $v < w < n$ , and  $t \geq 0$

$$\begin{aligned} \frac{d}{dt} \sum_{e \in \mathcal{E}_w^+} \tilde{\rho}_e(t) &= \sum_{e \in \mathcal{E}_w^+} \sum_{j \in \mathcal{E}_w^-} \tilde{f}_j(t) G_e^v(\tilde{\rho}^w(t)) - \sum_{e \in \mathcal{E}_w^+} \tilde{f}_e(t) \\ &= \sum_{e \in \mathcal{E}_w^-} \tilde{f}_e(t) - \sum_{e \in \mathcal{E}_w^+} \tilde{f}_e(t). \end{aligned} \quad (26)$$

Define the edge sets

$$\mathcal{A} := \bigcup_{v < w < n} \mathcal{E}_w^+, \quad \mathcal{D} := \bigcup_{v < w \leq n} \mathcal{E}_w^-$$

and let

$$\zeta(t) := \sum_{e \in \mathcal{A}} \tilde{\rho}_e(t).$$

Using (26), the identity  $\mathcal{A} \cup \mathcal{E}_{\mathcal{U}}^+ = \mathcal{D}$ , and (25), one gets that, given  $\varepsilon > 0$ , there exists  $s'(\varepsilon) \geq 0$  such that

$$\begin{aligned} \frac{d}{dt} \zeta(t) &= \sum_{v < w < n} \sum_{e \in \mathcal{E}_w^-} \tilde{f}_e(t) - \sum_{v < w < n} \sum_{e \in \mathcal{E}_w^+} \tilde{f}_e(t) \\ &= \sum_{e \in \mathcal{D}} \tilde{f}_e(t) - \sum_{e \in \mathcal{E}_n^-} \tilde{f}_e(t) - \sum_{e \in \mathcal{A}} \tilde{f}_e(t) \\ &= \sum_{e \in \mathcal{E}_{\mathcal{U}}^+} \tilde{f}_e(t) - \sum_{e \in \mathcal{E}_n^-} \tilde{f}_e(t) \\ &\leq R(\mathcal{N}, f^*) - \delta + \lambda_0 - \tilde{\lambda}_n(t) + \varepsilon \end{aligned} \quad (27)$$

for all  $t \geq s'(\varepsilon)$ . Now assume, by contradiction, that

$$\liminf_{t \rightarrow \infty} \tilde{\lambda}_n(t) > R(\mathcal{N}, f^*) - \delta + \lambda_0.$$

Then, there would exist some  $\varepsilon > 0$  and  $s'' \geq 0$  such that

$$\tilde{\lambda}_n(t) \geq R(\mathcal{N}, f^*) - \delta + \lambda_0 + 2\varepsilon, \quad \forall t \geq s''.$$

It would then follow from (27) that  $d\zeta(t)/dt \leq -\varepsilon$  for all  $t \geq \max\{s'(\varepsilon), s''\}$ , thus contradicting the fact that  $\zeta(t) \geq 0$  for all  $t \geq 0$ . Hence, necessarily

$$\liminf_{t \rightarrow \infty} \tilde{\lambda}_n(t) \leq R(\mathcal{N}, f^*) - \delta + \lambda_0 < \lambda_0$$

so that the perturbed dynamical network is not fully transferring. Then, from the arbitrariness of the perturbation's magnitude  $\delta \in (R(\mathcal{N}, f^*), \kappa)$ , it follows that the network's strong resilience is upper bounded by  $R(\mathcal{N}, f^*)$ .

## APPENDIX B PROOF OF THEOREM 3

In this section, we prove Theorem 3, by showing that, for a given a network  $\mathcal{N}$  satisfying Assumptions 1 and 2, a constant outflow  $\lambda_0 \geq 0$  at the origin node, and a locally responsive distributed routing policy  $\mathcal{G}$ , the strong resilience with respect to the unique limit flow  $f^* \in \text{cl}(\mathcal{F})$  of the associated dynamical network (4) satisfies

$$\gamma_1(f^*, \mathcal{G}) = R(\mathcal{N}, f^*).$$

Thanks to Theorem 2, it is sufficient to show that

$$\gamma_1(f^*, \mathcal{G}) \geq R(\mathcal{N}, f^*). \quad (28)$$

First, let us consider the case when  $f^* \in \text{cl}(\mathcal{F}) \setminus \mathcal{F}^*(\lambda_0)$ , i.e., when the limit flow of the unperturbed dynamical network (4) is not an equilibrium flow. As argued in Remark 1, in this case some of the capacity constraints are satisfied with equality, i.e., there exists some  $e \in \mathcal{E}$  such that  $f_e^* = f_e^{\max}$ . Then, Theorem 1 implies that  $f_j^* = f_j^{\max}$  for all  $j \in \mathcal{E}_{\sigma(e)}^+$ , so that

$$R(\mathcal{N}, f^*) \leq \sum_{j \in \mathcal{E}_{\sigma(e)}^+} (f_j^{\max} - f_j^*) = 0$$

and (28) is trivially satisfied, since  $\gamma_1(f^*, \mathcal{G}) \geq 0$  by definition. Therefore, for the rest of this section, we shall restrict ourselves to the case when  $f^* \in \mathcal{F}^*(\lambda_0)$ , i.e., when  $f^*$  is a globally attractive equilibrium flow of the unperturbed dynamical network (4).

Observe that, for any admissible perturbation, regardless of its magnitude, the perturbed dynamical network (10) satisfies all the assumptions of Theorem 1, which can therefore be applied to show the existence of a globally attractive perturbed limit flow  $\tilde{f}^* \in \text{cl}(\tilde{\mathcal{F}})$ , where  $\tilde{\mathcal{F}} := \times_{e \in \mathcal{E}} [0, \tilde{f}_e^{\max}]$ . This in particular implies that  $\tilde{\lambda}_n(t) = \sum_{e \in \mathcal{E}_n^-} \tilde{f}_e(t)$  converges to  $\tilde{\lambda}_n^* = \sum_{e \in \mathcal{E}_n^-} \tilde{f}_e^*$  as  $t$  grows large. However, this is not sufficient in order to prove strong resilience of the perturbed dynamical network (10), as it might be the case that  $\tilde{\lambda}_n^* < \lambda_0$ .

In fact, we are going to prove that, if the magnitude of the admissible perturbation is smaller than  $R(\mathcal{N}, f^*)$ , the perturbed limit flow  $\tilde{f}^*$  is an equilibrium flow for the perturbed dynamical network (10), so that  $\tilde{\lambda}_n^* = \lambda_0$  and (10) is fully transferring. In order to show this, for every non-destination node  $0 \leq v < n$ , we need to study the *perturbed local system*

$$\begin{aligned} \frac{d}{dt} \tilde{\rho}_e(t) &= \tilde{\lambda}(t) G_e^v(\tilde{\rho}^v(t)) - \tilde{f}_e(t), \\ \tilde{f}_e(t) &= \tilde{\mu}_e(\tilde{\rho}_e(t)), \end{aligned} \quad \forall e \in \mathcal{E}_v^+ \quad (29)$$

where  $\tilde{\lambda}(t)$  is a nonnegative-real-valued, Lipschitz continuous input. Indeed, [3, Lemma 4] can be applied to the perturbed local system (29) establishing convergence of the perturbed local flows  $\tilde{f}^v(t)$  to a local equilibrium flow  $\tilde{f}^*(\lambda) \in \tilde{\mathcal{F}}_v$ , where  $\tilde{\mathcal{F}}_v := \times_{e \in \mathcal{E}_v^+} [0, \tilde{f}_e^{\max}]$ , provided that the input flow  $\tilde{\lambda}(t)$  converges, as  $t$  grows large, to a value  $\lambda$  which is strictly smaller than the sum of the perturbed flow capacities of the outgoing links. However, such local result is not sufficient to prove strong resilience of the entire perturbed dynamical

network. The key property in order to prove such a global result is stated in Lemma 1, which describes how the limit flow redistributes itself upon the network perturbation. In particular, such a result ensures that the increase in flow on all the links downstream from a node whose outgoing links are affected by a given perturbation, is less than the magnitude of the disturbance itself. We shall refer to this property as the *diffusivity* of the local perturbed system.

*Lemma 1 (Diffusivity of the Local Perturbed System):* Let  $\mathcal{N}$  be a network satisfying Assumption 2,  $v$  be a non-destination node, and  $G^v : \mathcal{R}_v \rightarrow \mathcal{S}_v$  be a continuously differentiable function satisfying Properties a) and b) of Definition 5. Let  $\lambda_v^* \in [0, \sum_{e \in \mathcal{E}_v^+} f_e^{\max})$ ,  $\rho^* \in \mathcal{R}_v$ , and  $f^* \in \mathcal{F}_v$  satisfy  $\rho^* = \mu^v(f^*)$  and

$$f_e^* = \lambda_v^* G_e^v(\rho^*), \quad \forall e \in \mathcal{E}_v^+.$$

Let  $\tilde{\mathcal{N}}$  be an admissible perturbation of  $\mathcal{N}$ . Then, for every  $\lambda \in [0, \sum_{e \in \mathcal{E}_v^+} \tilde{f}_e^{\max})$ , the perturbed local system (29) with constant local input  $\hat{\lambda}(t) \equiv \lambda$  has a globally attractive equilibrium flow  $\hat{f}^*(\lambda) \in \tilde{\mathcal{F}}_v$  satisfying

$$\sum_{j \in \mathcal{J}} (\tilde{f}_j^*(\lambda) - f_j^*) \leq [\lambda - \lambda_v^*]_+ + \sum_{e \in \mathcal{E}_v^+} \delta_e, \quad \forall \mathcal{J} \subseteq \mathcal{E}_v^+ \quad (30)$$

where  $\delta_e := \|\mu_e(\cdot) - \tilde{\mu}_e(\cdot)\|_\infty$ .

*Proof:* Define  $\hat{\lambda} := \max\{\lambda, \lambda_v^*\}$ . Let  $\hat{\rho}^v(t)$  be the solution of the perturbed local system (29) with constant input  $\hat{\lambda}(t) \equiv \hat{\lambda}$ , and initial condition  $\hat{\rho}_e(0) = \rho_e^*$ , for all  $e \in \mathcal{E}_v^+$ , and let  $\hat{f}_e(t) := \tilde{\mu}_e(\hat{\rho}_e(t))$ . We shall first prove that

$$\hat{f}_e(t) \geq \tilde{\mu}_e(\rho_e^*), \quad \forall t \geq 0 \quad \forall e \in \mathcal{E}_v^+. \quad (31)$$

For this, consider a point  $\hat{\rho}^v \in \mathcal{R}_v$ , such that  $\hat{\rho}^v \neq \rho^*$ , and there exists some  $i \in \mathcal{E}_v^+$  such that  $\hat{\rho}_i = \rho_i^*$  and  $\hat{\rho}_e \geq \rho_e^*$  for all  $e \neq i \in \mathcal{E}_v^+$ . For such a  $\hat{\rho}^v$  and  $i$ , [3, Lemma 1] implies that  $G_i^v(\hat{\rho}^v) \geq G_i^v(\rho^*)$ . This, combined with the fact that  $\hat{\lambda} \geq \lambda_v^*$  and  $\tilde{\mu}_i(\hat{\rho}_i) \leq \mu_i(\hat{\rho}_i) = \mu_i(\rho_i^*)$ , yields

$$\hat{\lambda}_v G_i^v(\hat{\rho}^v) - \tilde{\mu}_i(\hat{\rho}_i) \geq \lambda_v^* G_i^v(\rho^*) - \mu_i(\rho_i^*) = 0. \quad (32)$$

Considering the region  $\Omega := \{\hat{\rho}^v \in \mathcal{R}_v : \hat{\rho}_e \geq \rho_e^*, \forall e \in \mathcal{E}_v^+\}$ , and denoting by  $\omega \in \mathbb{R}^{\mathcal{E}_v^+}$  the unit outward-pointing normal vector to the boundary of  $\Omega$  at  $\hat{\rho}^v$ , (32) shows that

$$\frac{d}{dt} (\hat{\rho}^v \cdot \omega) = (\hat{\lambda}_v G^v(\hat{\rho}^v) - \tilde{\mu}_v(\hat{\rho}^v)) \cdot \omega \leq 0$$

for all  $\hat{\rho}^v \in \partial\Omega$  and  $t \geq 0$ . Therefore,  $\Omega$  is invariant under (29). Since  $\hat{\rho}^v(0) = \rho^* \in \Omega$ , this proves (31).

Now, [3, Lemma 2] implies that there exists a globally attractive local equilibrium flow  $\hat{f}^* := \hat{f}^*(\hat{\lambda})$ . Then, for any  $\mathcal{J} \subseteq \mathcal{E}_v^+$ , passing to the limit of large  $t$  in (31) yields

$$\begin{aligned} \sum_j \hat{f}_j^* &= \hat{\lambda} - \sum_k \hat{f}_k^* \\ &\leq \hat{\lambda} - \sum_k \tilde{\mu}_k(\rho_k^*) \end{aligned}$$

$$\begin{aligned} &= \hat{\lambda} - \lambda_v^* + \sum_j f_j^* + \sum_k \mu_k(\rho_k^*) - \sum_k \tilde{\mu}_k(\rho_k^*) \\ &\leq [\hat{\lambda} - \lambda_v^*]_+ + \sum_j f_j^* + \sum_k \delta_k \\ &\leq [\hat{\lambda} - \lambda_v^*]_+ + \sum_j f_j^* + \sum_e \delta_e \end{aligned} \quad (33)$$

where the summation indices  $j$ ,  $k$ , and  $e$  run over  $\mathcal{J}$ ,  $\mathcal{E}_v^+ \setminus \mathcal{J}$ , and  $\mathcal{E}_v^+$ , respectively. Moreover, since  $\lambda \leq \hat{\lambda}$ , from [3, Lemma 3] one gets that

$$\tilde{f}_e^*(\lambda) \leq \tilde{f}_e^*(\hat{\lambda}) = \hat{f}_e^*, \quad \forall e \in \mathcal{E}_v^+.$$

In particular, this implies that

$$\sum_{j \in \mathcal{J}} \tilde{f}_j^*(\lambda) \leq \sum_{j \in \mathcal{J}} \hat{f}_j^*, \quad \forall \mathcal{J} \subseteq \mathcal{E}_v^+.$$

This, combined with (33), proves (30).  $\blacksquare$

The following lemma exploits the diffusivity property from Lemma 1 along with an induction argument on the topological ordering of the node set to prove that  $R(\mathcal{N}, f^*)$  is indeed a lower bound on the strong resilience of the network under the locally responsive distributed routing policies.

*Lemma 2 (Globally Attractive Perturbed Equilibrium):* Consider a network  $\mathcal{N}$  satisfying Assumptions 1 and 2, a locally responsive distributed routing policy  $\mathcal{G}$ , and a constant outflow  $\lambda_0 \in (0, C(\mathcal{N}))$  from the origin node. Assume that  $f^* \in \mathcal{F}^*(\lambda_0)$  is an equilibrium flow for the associated dynamical network. Let  $\tilde{\mathcal{N}}$  be an admissible perturbation of  $\mathcal{N}$  of magnitude  $\delta < R(\mathcal{N}, f^*)$ . Then, the perturbed dynamical network (10) has a globally attractive equilibrium flow and hence it is fully transferring.

*Proof:* First recall that Theorem 1 can be applied to the perturbed dynamical network (10) in order to prove existence of a globally attractive limit flow  $\tilde{f}^* \in \text{cl}(\tilde{\mathcal{F}})$ . For brevity in notation, for every  $1 \leq v < n$ , let

$$\lambda_v^* := \sum_{e \in \mathcal{E}_v^+} f_e^*, \quad \tilde{\lambda}_v^* := \sum_{e \in \mathcal{E}_v^-} \tilde{f}_e^*, \quad \tilde{\lambda}_v^{\max} := \sum_{e \in \mathcal{E}_v^+} \tilde{f}_e^{\max}.$$

Also, for every node  $v \in \mathcal{V}$ , let

$$\begin{aligned} \mathcal{D}_v &:= \bigcup_{0 \leq u \leq v} \mathcal{E}_u^+, \\ \mathcal{B}_v &:= \{(u, w) \in \mathcal{E} : 0 \leq u \leq v, v < w \leq n\} \end{aligned}$$

be, respectively, the set of all outgoing links, and the link-boundary of the node set  $\{0, 1, \dots, v\}$ .

By induction on  $u = 0, 1, \dots, n-1$ , we shall prove that

$$\sum_{e \in \mathcal{J}} (\tilde{f}_e^* - f_e^*) \leq \sum_{e \in \mathcal{D}_u} \delta_e, \quad \forall \mathcal{J} \subseteq \mathcal{B}_u. \quad (34)$$

First, notice that  $\mathcal{B}_0 = \mathcal{D}_0 = \mathcal{E}_0^+$ . Since

$$\sum_{e \in \mathcal{E}_0^+} \delta_e \leq \delta < R(\mathcal{N}, f^*) \leq \sum_{e \in \mathcal{E}_0^+} (f_e^{\max} - f_e^*)$$

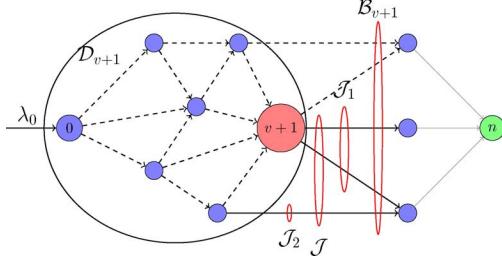


Fig. 7. Illustration of the sets used in proving the induction step in the proof of Lemma 2.

we also have that  $\lambda_0 < \tilde{\lambda}_0^{\max}$ . Therefore, by using (30) of Lemma 1, one can verify that (34) holds true for  $u = 0$ .

Now, for some  $v \leq n - 2$ , assume that (34) holds true for every  $u \leq v$ . Consider a subset  $\mathcal{J} \subseteq \mathcal{B}_{v+1}$  and let  $\mathcal{J}_1 := \mathcal{J} \cap \mathcal{E}_{v+1}^+$  and  $\mathcal{J}_2 := \mathcal{J} \setminus \mathcal{J}_1$  (see Fig. 7 for an illustration). By applying Lemma 1 to the set  $\mathcal{J}_1$ , one gets that

$$\sum_{e \in \mathcal{J}_1} (\tilde{f}_e^* - f_e^*) \leq [\tilde{\lambda}_{v+1}^* - \lambda_{v+1}^*]_+ + \sum_{e \in \mathcal{E}_{v+1}^+} \delta_e \quad (35)$$

for  $t \geq 0$ . It is easy to check that  $\mathcal{J}_2 \subseteq \mathcal{B}_v$  and  $\mathcal{E}_{v+1}^- \subseteq \mathcal{B}_v$ . Therefore, using (34) for the sets  $\mathcal{J}_2$  and  $\mathcal{J}_2 \cup \mathcal{E}_{v+1}^-$ , one gets the following inequalities respectively:

$$\sum_{e \in \mathcal{J}_2} (\tilde{f}_e^* - f_e^*) \leq \sum_{e \in \mathcal{D}_v} \delta_e \quad (36)$$

$$\sum_{e \in \mathcal{J}_2} (\tilde{f}_e^* - f_e^*) + \sum_{e \in \mathcal{E}_{v+1}^-} (\tilde{f}_e^* - f_e^*) \leq \sum_{e \in \mathcal{D}_v} \delta_e. \quad (37)$$

Consider the two cases:  $\tilde{\lambda}_{v+1}^* \leq \lambda_{v+1}^*$ , or  $\tilde{\lambda}_{v+1}^* > \lambda_{v+1}^*$ . By adding up (35) and (36) in the first case, or (35) and (37) in the second case, one gets that

$$\begin{aligned} \sum_{e \in \mathcal{J}} (\tilde{f}_e^* - f_e^*) &= \sum_{e \in \mathcal{J}_1} (\tilde{f}_e^* - f_e^*) + \sum_{e \in \mathcal{J}_2} (\tilde{f}_e^* - f_e^*) \\ &\leq \sum_{e \in \mathcal{E}_{v+1}^+} \delta_e + \sum_{e \in \mathcal{D}_v} \delta_e \\ &= \sum_{e \in \mathcal{D}_{v+1}} \delta_e. \end{aligned}$$

This proves (34) for node  $v + 1$  and hence the induction step.

Fix  $1 \leq v < n$ . Since  $\mathcal{E}_v^- \subseteq \mathcal{B}_{v-1}$ , (34) with  $u = v - 1$  implies that

$$\begin{aligned} \tilde{\lambda}_v^* &= \sum_{e \in \mathcal{E}_v^-} \tilde{f}_e^* \\ &\leq \sum_{e \in \mathcal{E}_v^-} f_e^* + \sum_{e \in \mathcal{D}_{v-1}} \delta_e \\ &= \sum_{e \in \mathcal{E}_v^+} f_e^* + \sum_{e \in \mathcal{E}} \delta_e - \sum_{e \in \mathcal{E} \setminus \mathcal{D}_{v-1}} \delta_e \\ &\leq \sum_{e \in \mathcal{E}_v^+} f_e^* + \delta - \sum_{e \in \mathcal{E}_v^+} \delta_e \end{aligned}$$

where the third step follows from the fact that

$$\sum_{e \in \mathcal{E}_v^-} f_e^* = \sum_{e \in \mathcal{E}_v^+}$$

by conservation of mass at node  $v$ , while the last inequality follows from the inclusion  $\mathcal{E}_v^+ \subseteq \mathcal{E} \setminus \mathcal{D}_{v-1}$ . Then, one gets that

$$\begin{aligned} \tilde{\lambda}_v^* &\leq \sum_e f_e^* + \delta - \sum_e \delta_e \\ &< \sum_e f_e^* + R(\mathcal{N}, f^*) - \sum_e \delta_e \\ &\leq \sum_e f_e^* + \sum_e (f_e^{\max} - f_e^*) - \sum_e \delta_e \\ &= \sum_e (f_e^{\max} - \delta_e) \\ &= \sum_e \tilde{f}_e^{\max} \end{aligned}$$

where the summation index  $e$  runs over  $\mathcal{E}_v^+$ . Hence, it follows from [3, Lemma 3] applied to the perturbed local system (29) that

$$\tilde{f}_e^* = \tilde{f}_e^*(\tilde{\lambda}_v^*) < \tilde{f}_e^{\max}, \quad \forall e \in \mathcal{E}_v^+ \quad (38)$$

for all  $1 \leq v < n - 1$ . Moreover, since

$$\lambda_0 = \sum_{e \in \mathcal{E}_0^+} f_e^* < \sum_{e \in \mathcal{E}_0^+} f_e^{\max}$$

applying [3, Lemma 3] again to the perturbed local system (29) shows that (38) holds true for  $v = 0$  as well. Hence,  $\tilde{f}_e^* < \tilde{f}_e^{\max}$  for all  $e \in \mathcal{E}$ , so that the limit flow  $\tilde{f}^*$  belongs to  $\mathcal{F}$ , and hence it is necessarily an equilibrium flow of the perturbed dynamical network (10), as argued in Remark 1. Therefore, the dynamical network (10) is fully transferring. ■

Theorem 3 now immediately follows from Lemma 2, and the arbitrariness of the admissible perturbation of magnitude smaller than  $R(\mathcal{N}, f^*)$ .

#### ACKNOWLEDGMENT

The authors would like to thank Prof. D. Shah of MIT for helpful discussions. They would also like to thank the Associate Editor and three anonymous Referees for several comments and additional references which have allowed to improve the presentation and contextualize the paper.

#### REFERENCES

- [1] G. Como, K. Savla, D. Acemoglu, M. A. Dahleh, and E. Frazzoli, "On robustness analysis of large-scale transportation networks," in *Proc. Int. Symp. Math. Theory Netw. Syst.*, 2010, pp. 2399–2406.
- [2] I. Simonsen, L. Buzna, K. Peters, S. Bornholdt, and D. Helbing, "Transient dynamics increasing network vulnerability to cascading failures," *Phys. Rev. Lett.*, vol. 100, no. 21, pp. 218701–1–218701–4, 2008.

- [3] G. Como, K. Savla, D. Acemoglu, M. A. Dahleh, and E. Frazzoli, “Robust distributed routing in dynamical flow networks. Part I: Locally responsive policies and weak resilience,” *IEEE Trans. Automatic Control*, 2012, to be published.
- [4] G. Como, K. Savla, D. Acemoglu, M. A. Dahleh, and E. Frazzoli, “Stability analysis of transportation networks with multiscale driver decisions,” *SIAM J. Control Optimiz.*, 2011.
- [5] G. Como, K. Savla, D. Acemoglu, M. A. Dahleh, and E. Frazzoli, “Robust distributed routing in dynamical networks with cascading failures,” in *Proc. 20th Int. Symp. Math. Theory Netw. Syst.*, Melbourne, Australia, 2012.
- [6] M. Sengoku, S. Shinoda, and R. Yatsuboshi, “On a function for the vulnerability of a directed flow network,” *Networks*, vol. 18, no. 1, pp. 73–83, 1988.
- [7] L. Tassiulas and A. Ephremides, “Stability properties of constrained queueing systems and scheduling policies for maximum throughput in multihop radio networks,” *IEEE Trans. Autom. Control*, vol. 37, no. 12, pp. 1936–1948, Dec. 1992.
- [8] S. H. Low, F. Paganini, and J. C. Doyle, “Internet congestion control,” *IEEE Control Syst. Mag.*, vol. 22, no. 1, pp. 28–43, Feb. 2002.
- [9] P. Dubey, “Inefficiency of Nash equilibria,” *Math. Operat. Res.*, vol. 11, no. 1, pp. 1–8, 1986.
- [10] T. Roughgarden, *Selfish Routing and the Price of Anarchy*. Cambridge, MA: MIT Press, 2005.
- [11] A. E. Motter and Y. Lai, “Cascade-based attacks on complex networks,” *Phys. Rev. E*, vol. 66, no. 6, pp. 065102-1–065102-4, 2002.
- [12] P. Crucitti, V. Latora, and M. Marchiori, “Model for cascading failures in complex networks,” *Phys. Rev. E*, vol. 69, no. 4, pp. 045104-1–045104-4, 2004.
- [13] T. H. Cormen, C. E. Leiserson, R. L. Rivest, and C. Stein, *Introduction to Algorithms*, 2nd ed. Cambridge, MA: MIT Press, 2001.
- [14] R. K. Ahuja, T. L. Magnanti, and J. B. Orlin, *Network Flows: Theory, Algorithms, and Applications*. Englewood Cliffs, NJ: Prentice-Hall, 1993.
- [15] V. S. Borkar and P. R. Kumar, “Dynamic Cesaro-Wardrop equilibration in networks,” *IEEE Trans. Autom. Control*, vol. 48, no. 3, pp. 382–396, Mar. 2003.
- [16] D. Bertsekas, *Nonlinear Programming*, 2 ed. Nashua, NH: Athena Scientific, 1999.
- [17] J. G. Wardrop, “Some theoretical aspects of road traffic research,” *ICE Proc.: Eng. Div.*, vol. 1, no. 3, pp. 325–362, 1952.
- [18] M. Beckmann, C. B. McGuire, and C. B. Winsten, *Studies in the Economics of Transportation*. New Haven, CT: Yale Univ. Press, 1956.
- [19] M. Patriksson, *The Traffic Assignment Problem: Models and Methods*. Zeist, The Netherlands: V.S.P. Intl Science, 1994.
- [20] M. Grant and S. Boyd, CVX: Matlab Software for Disciplined Convex Programming, 2011 [Online]. Available: <http://cvxr.com/cvx>, 1.21
- [21] M. Garavello and B. Piccoli, *Traffic Flow on Networks*. Springfield, MO: American Institute of Mathematical Sciences, 2006.



**Giacomo Como** (M’12) received the B.Sc., M.S., and Ph.D. degrees in applied mathematics from Politecnico di Torino, Turin, Italy, in 2002, 2004, and 2008, respectively.

He is an Assistant Professor at the Department of Automatic Control, Lund University, Lund, Sweden. In 2006–2007, he was a Visiting Assistant in Research at the Department of Electrical Engineering, Yale University. From 2008 to 2011, he was a Postdoctoral Associate at the Laboratory for Information and Decision Systems, Massachusetts

Institute of Technology. His current research interests include the mathematics of control and information theory, and networks.



**Ketan Savla** (M’12) received the B.Tech. degree in mechanical engineering from the Indian Institute of Technology Bombay, Mumbai, India, in 2003, the M.S. degree in mechanical engineering from the University of Illinois at Urbana-Champaign, Urbana, in 2004, and the M.A. degree in applied mathematics and the Ph.D. degree in electrical engineering from the University of California at Santa Barbara (UCSB), Santa Barbara, both in 2007.

He is currently an Assistant Professor in the Sonny Astani Department of Civil and Environmental Engineering at the University of Southern California, Los Angeles. Prior to that, he was a Postdoctoral Associate and then a Research Scientist in the Laboratory for Information and Decision Systems, Massachusetts Institute of Technology, Cambridge, MA. His current research interests include control and optimization techniques for mobile autonomous systems, human-in-loop systems and complex service networks.

Dr. Savla was awarded the Center for Control, Dynamical Systems, and Computation best thesis from UCSB in 2010.



**Daron Acemoglu** received the B.A. degree in economics from the University of York, York, U.K., 1989, the M.Sc. degree in mathematical economics and econometrics and the Ph.D. degree in economics from the London School of Economics, London, U.K., in 1990 and 1992, respectively.

He is the Elizabeth and James Killian Professor of Economics in the Department of Economics, Massachusetts Institute of Technology (MIT), Cambridge, and a member of the Economic Growth program of the Canadian Institute of Advanced Research. He is

also affiliated with the National Bureau Economic Research, the Center for Economic Performance, the Center for Economic Policy Research, and Microsoft Research Center. He is an elected fellow of the American Academy of Arts and Sciences, the Econometric Society, the European Economic Association, and the Society of Labor Economists. Since 1993, he has held the academic positions of Lecturer at the London School of Economics, and Assistant Professor, Pentti Kouri Associate Professor and Professor of Economics at MIT. His research covers a wide range of areas within economics, including political economy, economic development and growth, human capital theory, growth theory, innovation, search theory, network economics and learning. He is also the co-editor of *Econometrica* and of the *National Bureau of Economic Research Macroeconomic Annual*. He has recently completed a new book, along with Prof. James Robinson (Harvard University), entitled “Why Nations Fail: The Origins of Power, Prosperity and Poverty.”

Prof. Acemoglu received numerous awards and fellowships, including the award for best paper published in the *Economic Journal* in 1996 for his paper “Consumer Confidence and Rational Expectations: Are Agents’ Beliefs Consistent With the Theory?”, the inaugural T. W. Shultz Prize from the University of Chicago in 2004, the inaugural Sherwin Rosen Award for outstanding contribution to labor economics in 2004, Distinguished Science Award from the Turkish Sciences Association in 2006, and the John von Neumann Award, Rajk College, Budapest, in 2007. He was also awarded the John Bates Clark Medal in 2005, given every two years to the best economist in the United States under the age of 40 by the American Economic Association, and holds an Honorary Doctorate from the University of Utrecht.



**Munther A. Dahleh** (S’84–M’87–SM’97–F’01) was born in 1962. He received the B.S. degree in electrical engineering from Texas A&M University, College Station, and the Ph.D. degree in electrical engineering from Rice University, Houston, TX, in 1983 and 1987, respectively.

After the Ph.D. degree, he has been with the Department of Electrical Engineering and Computer Science, Massachusetts Institute of Technology, Cambridge, where he is currently a Full Professor and the Associate Head. He is the coauthor (with I.

Diaz-Bobillo) of the book *Control of Uncertain Systems: A Linear Programming Approach* (Prentice-Hall, 1995) and the coauthor (with N. Elia) of the book *Computational Methods for Controller Design* (Springer, 1998). His research interests include problems at the interface of robust control, filtering,

information theory, and computation. In addition to methodology development, he has been interested in the application of distributed control in the future electric grid and the future transportation system. He is also interested in various problems in network science. He is also interested in the interface between systems theory and neurobiology, and, in particular, in providing an anatomically consistent model of the motor control.

Dr. Dahleh served as an Associate Editor of the IEEE TRANSACTIONS ON AUTOMATIC CONTROL and of *Systems and Control Letters*. He has been the recipient of the Ralph Budd Award in 1987 for the best thesis at Rice University, the George Axelby Outstanding Paper Award (paper coauthored with J. B. Pearson in 1987), the National Science Foundation Presidential Young Investigator Award in 1991, the Finmeccanica Career Development Chair in 1992, the Donald P. Eckman Award from the American Control Council in 1993, the Graduate Students Council Teaching Award in 1995, the George Axelby Outstanding Paper Award (paper coauthored with Bamieh and Paganini in 2004), the Hugo Schuck Award for Theory (paper coauthored with Martins), and the George Axelby Outstanding Paper Award (paper coauthored with Martins in 2010). He was a Plenary Speaker at the 1994 American Control Conference, at the Mediterranean Conference on Control and Automation in 2003, at the Mathematical Theory for Networks and Systems in 2006, at the Symposium on System Identification in 2009, at Asian Control Conference in 2009, and at the Sixth Spanish, Italian, and Netherlands Meeting on Game Theory in 2010.



**Emilio Frazzoli** (M'03–SM'07) received the Laurea degree in aerospace engineering from the University of Rome "La Sapienza", Rome, Italy, in 1994 and the Ph.D. degree in navigation and control systems from the Department of Aeronautics and Astronautics, Massachusetts Institute of Technology (MIT), Cambridge, in 2001.

He is an Associate Professor of Aeronautics and Astronautics with the Laboratory for Information and Decision Systems, MIT. His main research interests lie in the general area of planning and control for mobile cyber-physical systems, with a particular emphasis on autonomous vehicles, mobile robotics, and transportation networks.

Dr. Frazzoli was the recipient of a National Science Foundation (NSF) CAREER award in 2002. He is an Associate Fellow of the American Institute of Aeronautics and Astronautics. He is currently serving as an Associate Editor for the IEEE TRANSACTIONS ON AUTOMATIC CONTROL, the *AIAA Journal of Guidance, Control, and Dynamics*, and the *Journal of Optimization Theory and Applications*.